

REGION 13

# Agusan River Flood Plain:

DREAM LiDAR Data Acquisition  
and Processing Report



TRAINING CENTER FOR APPLIED GEODESY AND PHOTOGRAMMETRY

2015





© University of the Philippines and the Department of Science and Technology 2015

Published by the UP Training Center for Applied Geodesy and Photogrammetry (TCAGP)  
College of Engineering  
University of the Philippines Diliman  
Quezon City  
1101 PHILIPPINES

This research work is supported by the Department of Science and Technology (DOST) Grants-in-Aid Program and is to be cited as:

UP-TCAGP (2015), DREAM LiDAR Data Acquisition and Processing for Agusan River Floodplain, Disaster Risk and Exposure Assessment for Mitigation (DREAM), DOST Grants-In-Aid Program, 53pp.

The text of this information may be copied and distributed for research and educational purposes with proper acknowledgment. While every care is taken to ensure the accuracy of this publication, the UP TCAGP disclaims all responsibility and all liability (including without limitation, liability in negligence) and costs which might incur as a result of the materials in this publication being inaccurate or incomplete in any way and for any reason.

For questions/queries regarding this report, contact:

**Engr. Czar Jakiri Sarmiento, MSRS**

Project Leader, Data Acquisition Component, DREAM Program  
University of the Philippines Diliman  
Quezon City, Philippines 1101  
Email: czarjakiri@gmail.com

**Engr. Ma. Rosario Concepcion O. Ang, MSRS**

Project Leader, Data Processing Component, DREAM Program  
University of the Philippines Diliman  
Quezon City, Philippines 1101  
Email: concon.ang@gmail.com

**Enrico C. Paringit, Dr. Eng.**

Program Leader, DREAM Program  
University of the Philippines Diliman  
Quezon City, Philippines 1101  
E-mail: paringit@gmail.com

National Library of the Philippines  
ISBN: 978-971-9695-23-3



# Table of Contents

1.	INTRODUCTION .....	1
1.1	About the DREAM Program .....	2
1.2	Objectives and Target Outputs .....	2
1.3	General Methodological Framework .....	3
2.	STUDY AREA .....	5
3.	METHODOLOGY .....	9
3.1	Acquisition Methodology .....	10
3.1.1	Pre-Site Preparations .....	10
3.1.1.1	Creation of Flight Plans .....	10
3.1.1.2	Collection of Existing Reference Points and Benchmarks .....	11
3.1.1.3	Preparation of Field Plan .....	12
3.1.2	Ground Base Set-up .....	13
3.1.3	Acquisition of Digital Elevation Data (LiDAR Survey) .....	13
3.1.4	Transmittal of Acquired LiDAR Data .....	13
3.1.5	Equipment (ALTM Pegasus) .....	14
3.2	Processing Methodology .....	15
3.2.1	Data Transfer .....	15
3.2.2	Trajectory Computation .....	16
3.2.3	LiDAR Point Cloud Rectification .....	16
3.2.4	LiDAR Data Quality Checking .....	17
3.2.5	LiDAR Point Cloud Classification and Rasterization .....	20
3.2.6	DEM Editing and Hydro-correction .....	23
4.	RESULTS AND DISCUSSION .....	25
4.1	LiDAR Data Acquisition in Agusan Floodplains .....	26
4.1.1	Flight Plans .....	26
4.1.2	Ground Base Station .....	28
4.2	LiDAR Data Processing .....	32
4.2.1	Trajectory Computation .....	32
4.2.2	LiDAR Point Cloud Computation .....	34
4.2.3	LiDAR Data Quality Checking .....	34
4.2.4	LiDAR Point Cloud Classification and Rasterization .....	37
4.2.5	DEM Editing and Hydro-correction .....	38
5.	ANNEX .....	43
	Annex A. Optech Technical Specification Of The Pegasus Sensor .....	44
	Annex B. Optech Technical Specification Of The D-8900 Aerial Digital Camera .....	45
	Annex C. The Survey Team .....	46
	Annex D. NAMRIA Certification .....	47
	Annex E. Data Transfer Sheets .....	49
	Annex F. Flight Logs .....	50
1.	Flight Log for 1ASA119A Mission .....	50
2.	Flight Log for 1ASN1C120A Mission .....	51
3.	Flight Log for 1ASD121A Mission .....	52
4.	Flight Log for 1ASN1S122A Mission .....	53



# List of Figures

Figure 1.	The General Methodological Framework Of The Program .....	3
Figure 2.	Agusan River Basin Location Map .....	6
Figure 3.	Agusan River Basin Soil Map .....	7
Figure 4.	Agusan River Basin Land Cover Map .....	7
Figure 5.	Flowchart Of Project Methodology .....	10
Figure 6.	Concept Of LiDAR Data Acquisition Parameters .....	11
Figure 7.	LiDAR Data Management For Transmittal .....	14
Figure 8.	The ALTM Pegasus System: A) Parts Of The Pegasus System, B) The System As Installed In Cessna T206h .....	14
Figure 9.	Schematic Diagram Of The Data Processing .....	15
Figure 10.	Misalignment Of A Single Roof Plane From Two Adjacent Flight Lines, Before Rectification (Left). Least Squares Adjusted Roof Plane, After Rectification (Right) .....	17
Figure 11.	Elevation Difference Between Flight Lines Generated From Lastools .....	18
Figure 12.	Profile Over Roof Planes (A) And A Zoomed-In Profile On The Area Encircled In Yellow (B) .....	19
Figure 13.	Ground Classification Technique Employed In Terrascan .....	20
Figure 14.	Resulting DTM Of Ground Classification Using The Default Parameters (A) And Adjusted Parameters (B) .....	21
Figure 15.	Default Terrascan Building Classification Parameters .....	22
Figure 16.	Different Examples Of Air Points Manually Deleted In The Terrascan Window .....	25
Figure 17.	Agusan Floodplain Flight Plans .....	27
Figure 18.	Butuan Bm Under Marcos Bridge, Butuan City .....	28
Figure 19.	Agusan Floodplain Flight Plans And Base Station .....	29
Figure 20.	Agusan Floodplain Data Acquisition Las Output .....	30
Figure 21.	Smoothed Performance Metric Parameters Of Agusan Flight .....	32
Figure 22.	Solution Status Parameters Of Agusan Flight .....	33
Figure 23.	Coverage Of LiDAR Data For The Agusan Mission .....	34
Figure 24.	Image Of Data Overlap For The Agusan Mission .....	35
Figure 25.	Density Map Of Merged LiDAR Data For The Agusan Mission .....	35
Figure 26.	Elevation Difference Map Between Flight Lines .....	36
Figure 27.	Quality Checking With The Profile Tool Of Qt Modeler .....	37
Figure 28.	(A) Agusan Floodplains And (B) Agusan Classification Results In Terrascan .....	37
Figure 29.	Point Cloud (A) Before And (B) After Classification .....	38
Figure 30.	Images Of DTMs Before And After Manual Editing .....	38
Figure 31.	Map Of Agusan River System With Validation Survey Shown In Blue .....	39
Figure 32.	One-One Correlation Plot Between Topographic And LiDAR Data .....	39
Figure 33.	Final DTM Of Agusan With Validation Survey Shown In Blue .....	40
Figure 34.	Final DSM In Agusan .....	41
Figure 35.	Sample 1X1 Square Kilometer DSM .....	41
Figure 36.	Sample 1X1 Square Kilometer DTM .....	42
Figure 37.	Sample 1X1 Ortho Map .....	42



# List of Tables

Table 1.	Relevant LiDAR Parameters .....	11
Table 2.	List Of Target River Systems In The Philippines .....	12
Table 3.	Smoothed Solution Status Parameters In POSPac Mms V6.2 .....	16
Table 4.	Parameters Investigated During Quality Checks .....	17
Table 5.	Ground Classification Parameters Used In Terrascan For Floodplain And Watershed Areas .....	20
Table 6.	Classification Of Vegetation According To The Elevation Of Points .....	21
Table 7.	Parameters Used In LiDAR System During Flight Acquisition .....	26
Table 8.	Details Of Dvs-1 Gcp Used As Base Station For The LiDAR Acquisition .....	28
Table 9.	Flight Missions For LiDAR Data Acquisition In Agusan Floodplain .....	31
Table 10.	Area Of Coverage Of The LiDAR Data Acquisition In Agusan Floodplain .....	31
Table 11.	Agusan Classification Results In Terrascan .....	38
Table 12.	Statistical Values For The Calibration Of Flights .....	40



# Abbreviations

ALTM	Airborne Laser Terrain Mapper
DAC	Data Acquisition Component
DEM	Digital Elevation Model
DSM	Digital Surface Model
DTM	Digital Terrain Model
DVC	Data Validation Component
FOV	Field of View
FTP	File Transfer Protocol
GPS	Global Positioning System
GNSS	Global Navigation Satellite System
POS	Position Orientation System
PRF	Pulse Repetition Frequency
NAMRIA	National Mapping and Resource Information Authority





# Introduction



# Introduction

---

## INTRODUCTION

### 1.1 About the DREAM Program

The UP Training Center for Applied Geodesy and Photogrammetry (UP TCAGP) conducts a research program entitled “Nationwide Disaster Risk and Exposure Assessment for Mitigation (DREAM) Program” funded by the Department of Science and Technology (DOST) Grants-in-Aid Program. The DREAM Program aims to produce detailed, up-to-date, national elevation dataset for 3D flood and hazard mapping to address disaster risk reduction and mitigation in the country.

The DREAM Program consists of four components that operationalize the various stages of implementation. The Data Acquisition Component (DAC) conducts aerial surveys to collect Light Detecting and Ranging (LiDAR) data and aerial images in major river basins and priority areas. The Data Validation Component (DVC) implements ground surveys to validate acquired LiDAR data, along with bathymetric measurements to gather river discharge data. The Data Processing Component (DPC) processes and compiles all data generated by the DAC and DVC. Finally, the Flood Modeling Component (FMC) utilizes compiled data for flood modeling and simulation.

Overall, the target output is a national elevation dataset suitable for 1:5000 scale mapping, with 50 centimeter horizontal and vertical accuracies. These accuracies are achieved through the use of state-of-the-art airborne Light Detection and Ranging (LiDAR) technology and appended with Synthetic-aperture radar (SAR) in some areas. It collects point cloud data at a rate of 100,000 to 500,000 points per second, and is capable of collecting elevation data at a rate of 300 to 400 square kilometers per day, per sensor.

### 1.2 Objectives and Target Outputs

The program aims to achieve the following objectives:

- a) To acquire a national elevation and resource dataset at sufficient resolution to produce information necessary to support the different phases of disaster management,
- b) To operationalize the development of flood hazard models that would produce updated and detailed flood hazard maps for the major river systems in the country,
- c) To develop the capacity to process, produce and analyze various proven and potential thematic map layers from the 3D data useful for government agencies,
- d) To transfer product development technologies to government agencies with geospatial information requirements, and,
- e) To generate the following outputs
  - 1) flood hazard map
  - 2) digital surface model
  - 3) digital terrain model and
  - 4) orthophotograph



# Introduction

## 1.3 General Methodological Framework

The methodology employed to accomplish the project's expected outputs are subdivided into four (4) major components, as shown in Figure 1. Each component is described in detail in the following sections.

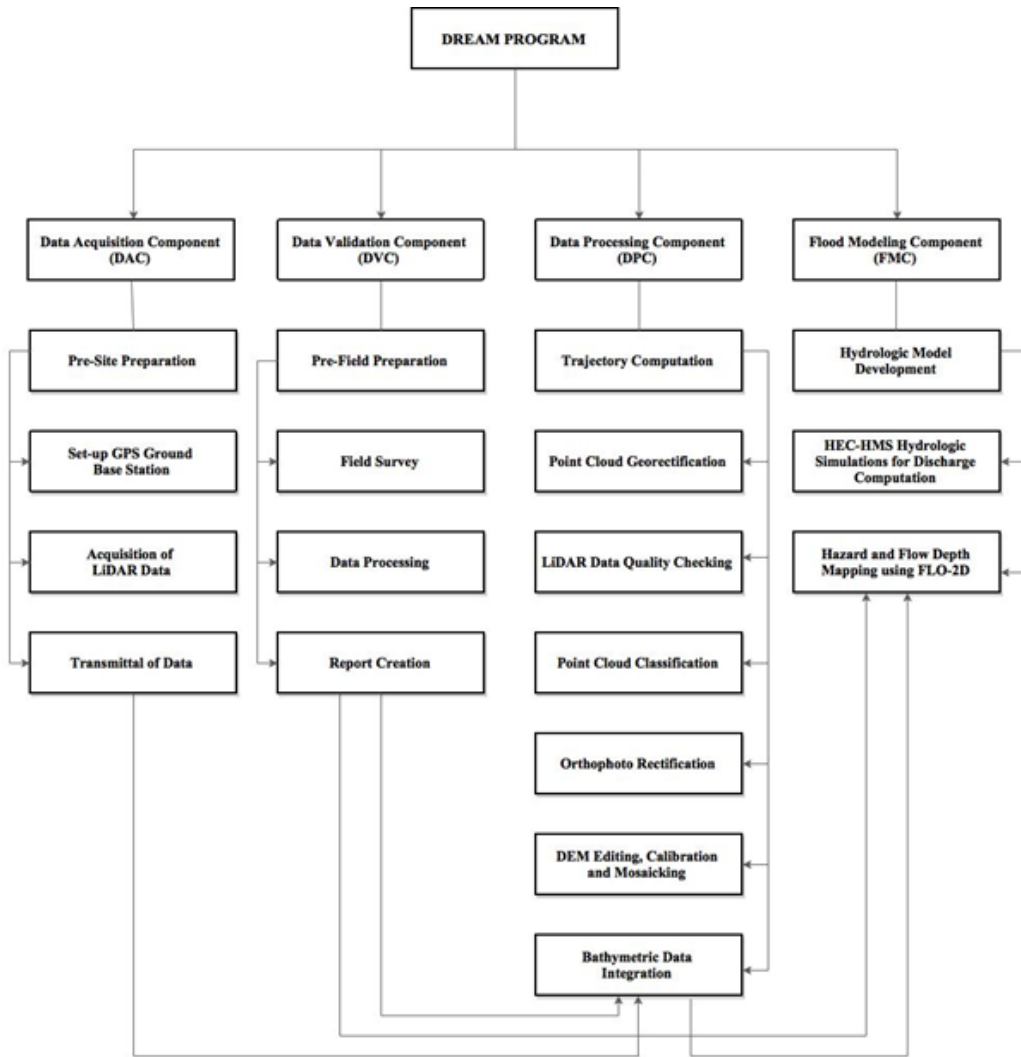


Figure 1. The General Methodological Framework of the Program





# Study Area

# Study Area

## 2.1 Agusan River Basin

The Agno River Basin is situated in Luzon and is the fifth largest river basin in the Philippines, with an estimated basin area of 5,852 square kilometers. The Agno River is also considered as the third largest in Luzon, with its river system having a length of 270 kilometers, 90 kilometers of which runs through mountainous terrain and canyons. The location of the Agno River Basin is as shown in Figure 2.

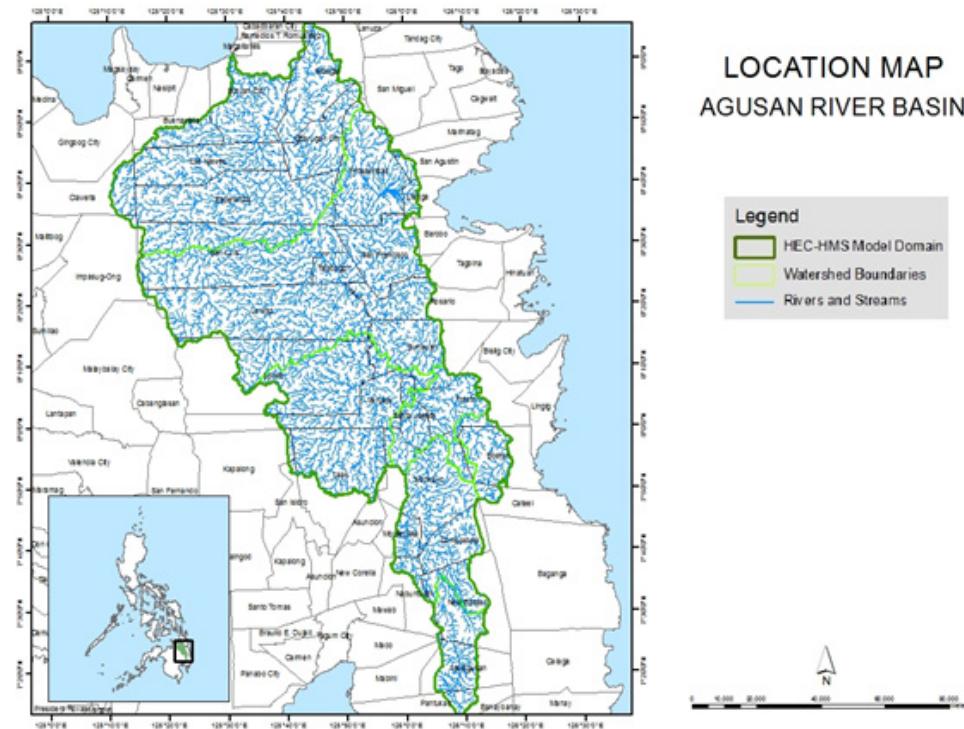


Figure 2. Agusan River Basin Location Map

The headwaters of the Agno River are at the Cordillera Mountains and drains about 6.6 cubic kilometres of fresh water into the Lingayen Gulf in Pangasinan, becoming the largest Philippine river in terms of water discharge. It has 4 principal tributaries-- Tarlac River, which is the main branch, the Pila River, the Camiling River, and the Ambayoan River. It drains the western portion of the island and a large part of its catchment is located in Pangasinan. According to the Agno River Basin Development Commission (ARBDC), the river basin covers 68 municipalities and 5 cities in the provinces of Benguet, Tarlac and Pangasinan.

The land and soil characteristics are important parameters used in assigning the roughness coefficient for different areas within the river basin. The roughness coefficient, also called Manning's coefficient, represents the variable flow of water in different land covers (i.e. rougher, restricted flow within vegetated areas, smoother flow within channels and fluvial environments).

The shape files of the soil and land cover were taken from the Bureau of Soils, which is under the Department of Environment and Natural Resources Management, and National Mapping and Resource Information Authority (NAMRIA). The soil and land cover of Agno River Basin are shown in Figures 2 and 3, respectively.

# Study Area

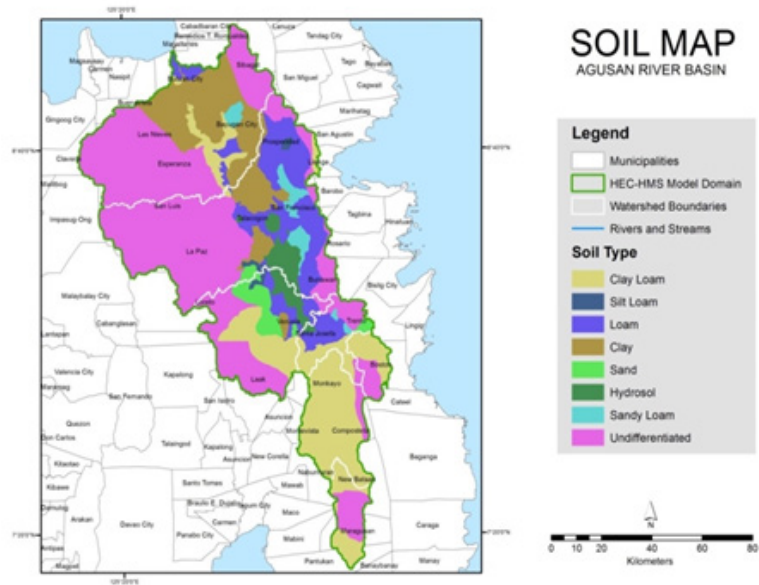


Figure 3. Agusan River Basin Soil Map

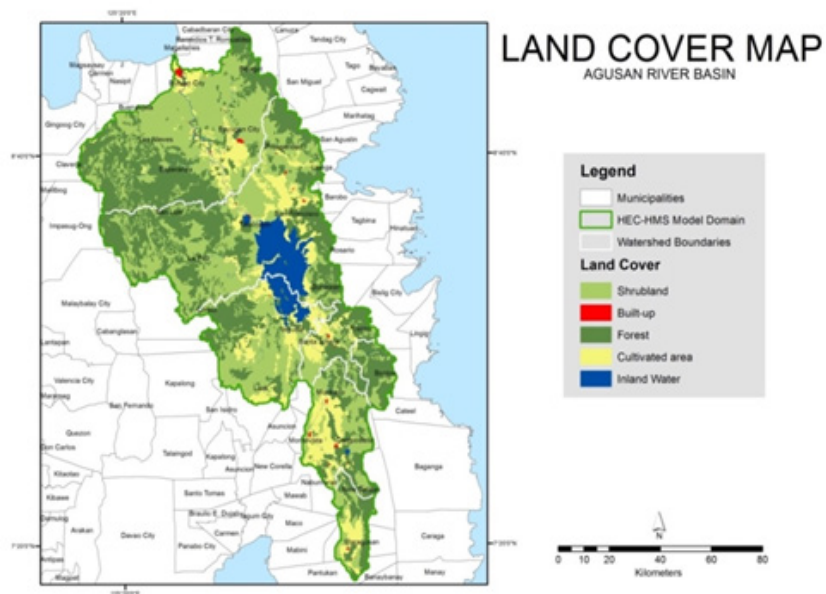


Figure 4. Agusan River Basin Land Cover Map





# Methodology



# Methodology

## METHODOLOGY

### 3.1 Acquisition Methodology

The methodology employed to accomplish the project’s expected outputs are subdivided into four (4) major components, as shown in Figure 5. Each component is described in detail in the following sections.

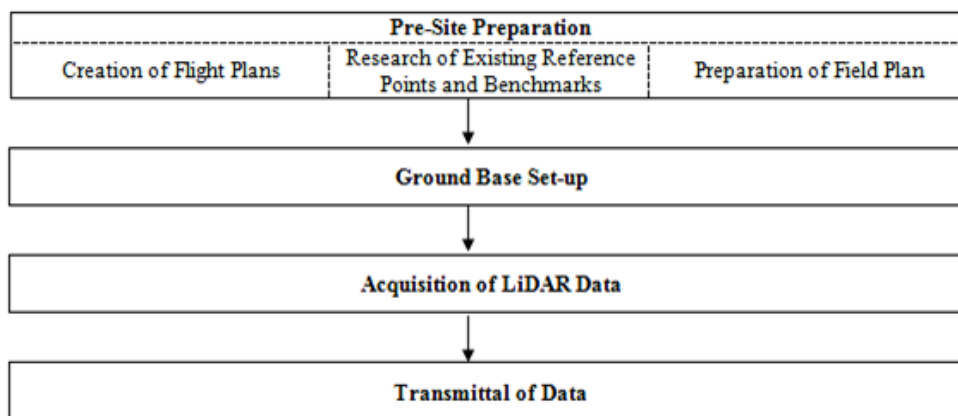


Figure 5. Flowchart of project methodology

#### 3.1.1 Pre-Site Preparations

##### 3.1.1.1 Creation of Flight Plans

Flight planning is the process of configuring the parameters of the aircraft and LiDAR technology (i.e., altitude, angular field of view (FOV)), speed of the aircraft, scans frequency and pulse repetition frequency) to achieve a target of two points per square meter point density for the floodplain. This ensures that areas of the floodplain that are most susceptible to floods will be covered. LiDAR parameters and their computations are shown in Table 1.

The parameters set in the LiDAR sensor to optimize the area coverage following the objectives of the project and to ensure the aircraft’s safe return to the airport (base of operations) are shown in Table 1. Each flight acquisition is designed for four operational hours. The maximum flying hours for Cessna 206H is five hours.

# Methodology

Table 1. Relevant LiDAR parameters

SW (Swath Width)		$SW = 2 * H * \tan (\theta/2)$	H – altitude $\Theta$ – angular FOV
Point Spacing	$\Delta X$ -across	$\Delta X_{across} = (\Theta * H) / (N \cos^2(\Theta/2))$	$\Delta X_{across}$ – point spacing across the flight line H – altitude $\Theta$ – angular FOV N – number of points in one scanning line
	$\Delta X$ -along	$\Delta X_{along} = v / fsc$	$\Delta X_{along}$ - point spacing along the flight line v – forward speed (m/s) fsc – scanning rate or scan frequency
Point density, $d_{min}$		$d_{min} = 1 / (\Delta X_{across} * \Delta X_{along})$	$\Delta X_{across}$ , $\Delta X_{along}$ point spacings
Flight line separation, e		$e = SW * (1 - \text{overlapping factor})$	SW – swath width
# of flight lines, n		$n = w / [(1 - \text{overlap}) * SW]$	w-width of the map that will be produced in meters. The direction of flights will be perpendicular to the width.

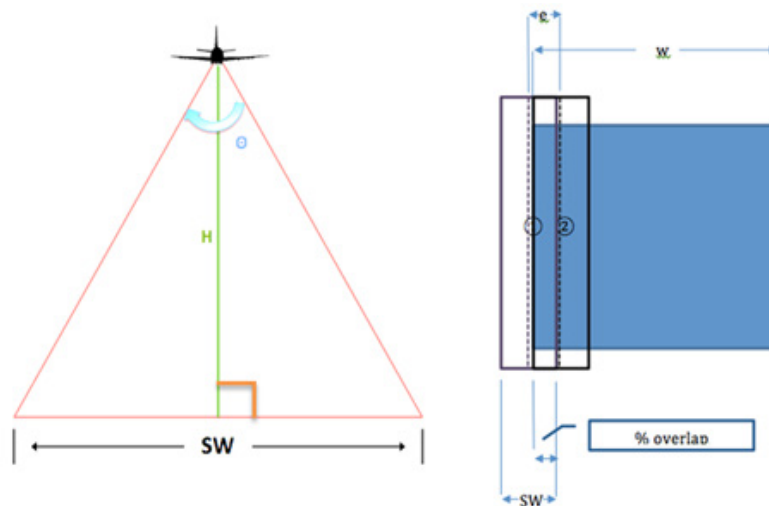


Figure 6. Concept of LiDAR data acquisition parameters

The relationship among altitude, swath, and FOV is shown in Figure 6. Given the altitude of the survey (H) and the angular FOV, the survey coverage for each pass (swath) can be calculated by doubling the product of altitude and tangent of half the field of view.

### 3.1.1.2 Collection of Existing Reference Points and Benchmarks

Collection of pertinent technical data, available information, and coordination with the National Mapping and Resource Information Authority (NAMRIA) is conducted prior to the surveys. Reference data collected includes locations and descriptions of horizontal and vertical control (elevation benchmarks) points within or near the project area. These control points are used as base stations for the aerial survey operations. Base stations are observed simultaneously with the acquisition flights.

# Methodology

## 3.1.1.3 Preparation of Field Plan

In preparation for the field reconnaissance and actual LiDAR data acquisition, a field plan is prepared by the implementation team. The field plan serves as a guide for the actual fieldwork and included personnel, logistical, financial, and technical details. Three major factors are included in field plan preparation: priority areas for the major river basin system; budget; and accommodation and vehicle rental.

LiDAR data are acquired for the floodplain area of the river system as per order of priority based on history of flooding, loss of lives, and damages of property. The order of priority in which LiDAR data surveys are conducted by the team for the floodplain areas of the 18 major river systems and 3 additional systems is shown in Table 2.

Table 2. List of Target River Systems in the Philippines

	Target River System	Location	Area of the River System (km <sup>2</sup> )	Area of the Flood Plain (km <sup>2</sup> )	Area of the Watershed (km <sup>2</sup> )
1	Cagayan de Oro	Mindanao	1,364	25	1,338.51
1.1	Iponan	Mindanao	438	33	404.65
2	Mandulog	Mindanao	714	7	707.41
2.1	Iligan	Mindanao	153	7	146.38
2.2	Agus	Mindanao	1,918	16	1,901.60
3	Pampanga	Luzon	11,160	4458	6702
4	Agno	Luzon	6,220	1725	4495
5	Bicol	Luzon	3,173	585	2,587.79
6	Panay	Visayas	2,442	619	1823
7	Jalaur	Visayas	2,105	713	1,392.00
8	Ilog Hilabangan	Visayas	2,146	179	1967
9	Magasawang Tubig	Luzon	1,960	483	1,477.08
10	Agusan	Mindanao	11,814	262	11,551.62
11	Tagoloan	Mindanao	1,753	30	1,722.90
12	Davao	Mindanao	1,609	54	1555
13	Tagum	Mindanao	2,504	595	1,909.23
14	Buayan	Mindanao	1,589	201	1,388.21
15	Mindanao	Mindanao	20,963	405	20,557.53
16	Lucena	Luzon	238	49	189.31
17	Infanta	Luzon	1,029	90	938.61
18	Boracay	Visayas	43.34	43.34	n/a
19	Cagayan	Luzon	28,221	10386	17,835.14



# Methodology

---

## 3.1.2 Ground Base Set-up

A reconnaissance is conducted one day before the actual LiDAR survey for purposes of recovering control point monuments on the ground and site visits of the survey area set in the flight plan for the floodplain. Coordination meetings with the Airport Manager, regional DOST office, local government units and other concerned line government agencies are also held.

Ground base stations are established within 30-kilometer radius of the corresponding survey area in the flight plan. This enables the system to establish its position in three-dimensional (3D) space so that the acquired topographic data will have an accurate 3D position since the survey required simultaneous observation with a base station on the ground using terrestrial Global Navigation Satellite System (GNSS) receivers.

## 3.1.3 Acquisition of Digital Elevation Data (LiDAR Survey)

Acquisition of LiDAR data is done by following the flight plans. The survey uses a LiDAR instrument mounted on the aircraft with its sensor positioned through a specially modified peep hole on the belly of the aircraft. The pilots are guided by the flight guidance software which uses the data out of the flight planning program with a mini-display at the pilot's cockpit showing the aircraft's real-time position relative to the current survey flight line. The reference points established by NAMRIA are also monitored and used to calibrate the data.

As the system collected LiDAR data, ranges and intensities are recorded on hard drives dedicated to the system while the images are stored on the camera hard drive. Position Orientation System (POS) data is recorded on the POS computer inside the control rack. It can only be accessed and downloaded via file transfer protocol (ftp) to the laptop computer. GPS observations were downloaded each day for efficient data management.

## 3.1.4 Transmittal of Acquired LiDAR Data

All data surrendered are monitored, inspected and re-checked by securing a data transfer checklist signed by the downloader (Data Acquisition Component) and the receiver (Data Processing Component). The data transfer checklist shall include the following: date of survey, mission name, flight number, disk size of the necessary data (LAS, LOGS, POS, Images, Mission Log File, Range, Digitizer and the Base Station), and the data directory within the server. Figure 7 shows the arrangement of folders inside the data server.

# Methodology

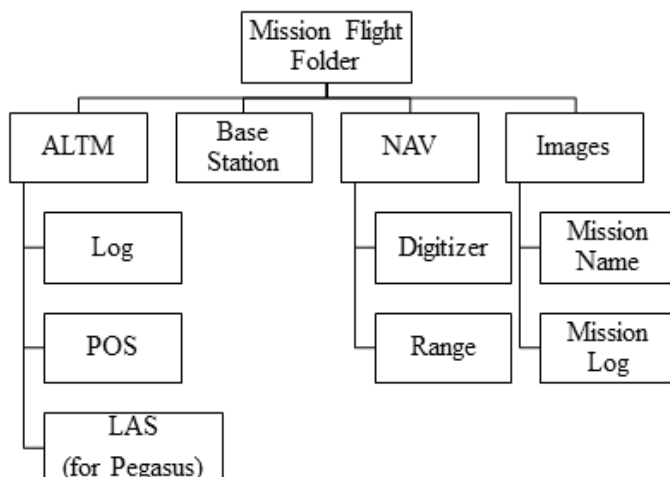


Figure 7. LiDAR Data Management for transmittal

## 3.1.5 Equipment (ALTM Pegasus)

The ALTM Pegasus (Optech, Inc) is a laser based system suitable for topographic survey (Figure 8). It has a dual output laser system for maximum density capability. The LiDAR system is equipped with an Inertial Measurement Unit (IMU) and GPS for geo-referencing of the acquired data (Annex A contains the technical specification of the system).

The camera of the Pegasus sensor is tightly integrated with the system. It has a footprint of 8,900 pixels across by 6,700 pixels along the flight line (Annex B contains the technical specification of the D-8900 aerial digital camera).

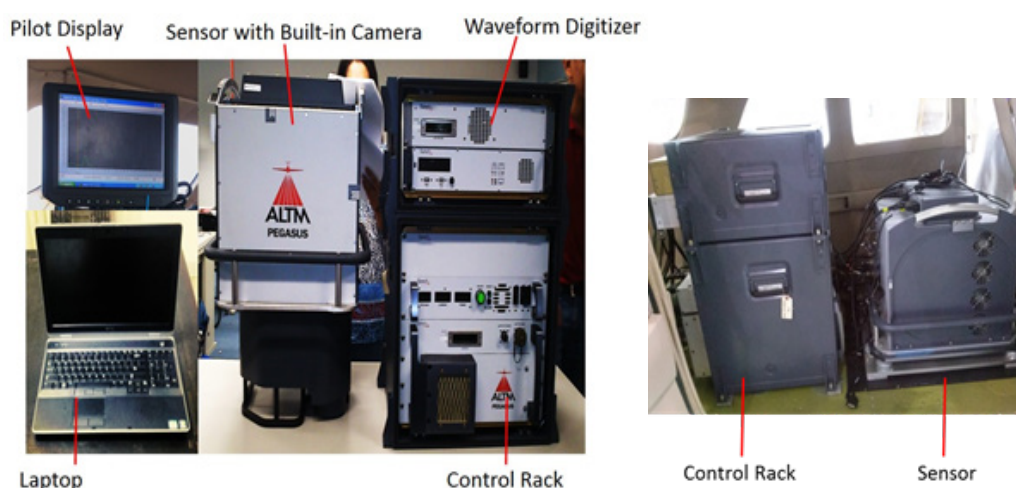


Figure 8. The ALTM Pegasus System: a) parts of the Pegasus system, b) the system as installed in Cessna T206H

# Methodology

## 3.2 Processing Methodology

The schematic diagram of the workflow implemented by the Data Processing Component (DPC) is shown in Figure 9. The raw data collected by the Data Acquisition Component (DAC) is transferred to DPC. Pre-processing of this data starts with the computation of trajectory and georectification of point cloud, in which the coordinates of the LiDAR point cloud data are adjusted and checked for gaps and shifts, using POSpac, LMS, LAsTools and Quick Terrain (QT) Modeler software.

The unclassified LiDAR data then undergoes point cloud classification, which allows cleaning of noise data that are not necessary for further processing, using TerraScan software. The classified point cloud data in ASCII format is used to generate a data elevation model (DEM), which is edited and calibrated with the use of validation and bathymetric survey data collected from the field by the Data Validation and Bathymetry Component (DVBC). The final DEM is then used by the Flood Modeling Component (FMC) to generate the flood models for different flooding scenarios.

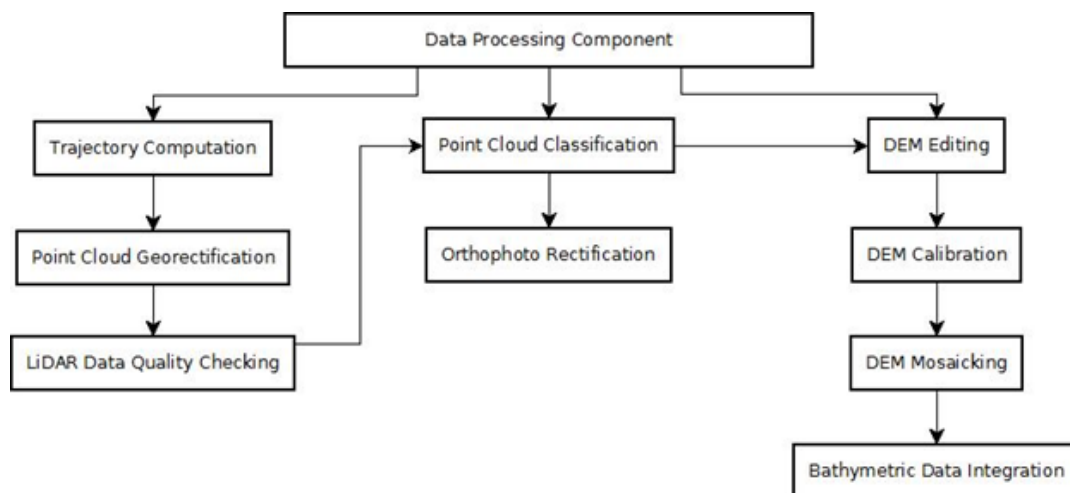


Figure 9. Schematic diagram of the data processing

### 3.2.1 Data Transfer

The Agusan mission, named 1ASD122B, was flown with the Airborne LiDAR Terrain Mapper (ALTM™ Optech Inc.) by Pegasus system on January 29, 2013. The Data Acquisition Component (DAC) transferred 29.6 Gigabytes of Range data, 286 Megabytes of POS data, 2.34 Megabytes of GPS base station data, and 36.2 Gigabytes of raw image data to the data server on May 15, 2013.

# Methodology

## 3.2.2 Trajectory Computation

The trajectory of the aircraft is computed using the software POSPac MMS v6.2. It combines the POS data from the integrated GPS/INS system installed on the aircraft, and the Rinex data from the GPS base station located within 25 kilometers of the area. It then computes the Smoothed Best Estimated Trajectory (SBET) file, which contains the best estimated trajectory of the aircraft, and the Smoothed Root Mean Square Estimation error file (SMRMSG), which contains the corresponding standard deviations of the position parameters of the aircraft at every point on the computed trajectory.

The key parameters checked to evaluate the performance of the trajectory are the Solution Status parameters and the Smoothed Performance Metrics parameters. The Solution Status parameters characterize the GPS satellite geometry and baseline length at the time of acquisition, and the processing mode used by POSPac. The acceptable values for each Solution Status parameter are shown in Table 3.

The Smoothed Performance Metrics parameters describe the root mean square error (RMSE) for the north, east and down (vertical) position of the aircraft for each point in the computed trajectory. A RMSE value of less than 4 centimeters for the north and east position is acceptable, while a value of less than 8 centimeters is acceptable for the down position.

Table 3. Solution Status parameters in POSPac MMS v6.2.

Parameter	Optimal values
Number of satellites	More than 6 satellites
Position Dilution of Precision (PDOP)	Less than 3
Baseline Length	Less than 30 km
Processing mode	Less than or equal to 1, however short bursts of values greater than 1 are acceptable.

## 3.2.3 LiDAR Point Cloud Rectification

The trajectory file (SBET) and its corresponding accuracy file (SMRMSG) generated in POSPac are merged with the Range file to compute the coordinates of each individual point. The coordinates of points within the overlap region of contiguous strips vary due to small deviations in the trajectory computation for each strip. These strip misalignments are corrected by matching points from overlapping laser strips. This is done by the LiDAR Mapping Suite (LMS) software developed by Optech.

LMS is a LiDAR software package used for automated LiDAR rectification. It has the capability to extract planar features per flight line and to form correspondence among the identical planes available in the overlapping areas (illustrated in Figure 10). In order to produce geometrically correct point cloud, the redundancy in the overlapping areas of flight lines is used to determine the necessary corrections for the observations.



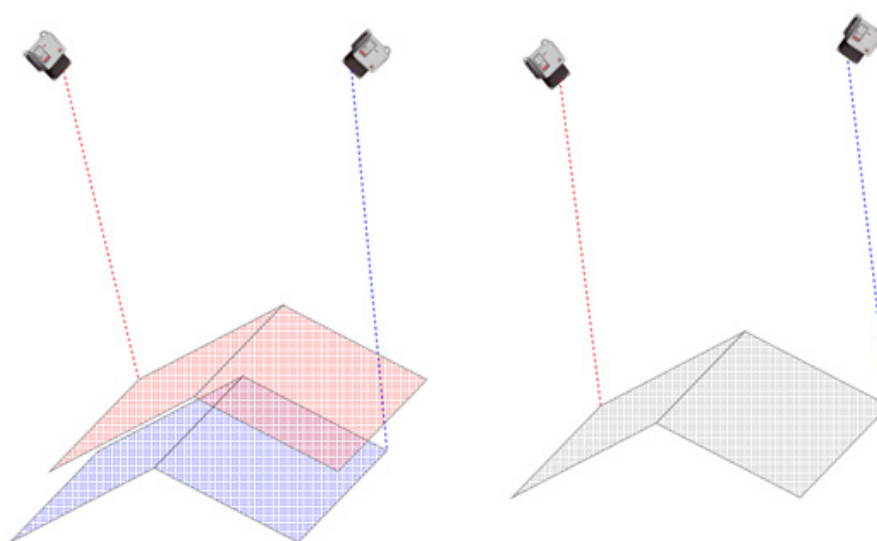


Figure 10. Misalignment of a single roof plane from two adjacent flight lines, before rectification (left). Least squares adjusted roof plane, after rectification (right).

The orientation parameters are corrected in LMS by using least squares adjustment to obtain the best-fit parameters and improve the accuracy of the LiDAR data. The primary indicators of the LiDAR rectification accuracy are the standard deviations of the corrections of the orientation parameters. These values are seen on the BoreSight corrections, GPS position corrections, and IMU attitude corrections, all of which are located on the LMS processing summary report. Optimum accuracy is obtained if the BoreSight and IMU attitude correction standard deviations are less than  $0.001^\circ$ , and if the GPS position standard deviations are below 0.01 m.

### 3.2.4 LiDAR Data Quality Checking

After the orientation parameters are corrected and the point cloud coordinates are computed, the entire point cloud data undergoes quality checking, to see if: (a) there are remaining horizontal and vertical misalignments between contiguous strips, and; (b) to check if the density of the point cloud data reach the target density for the site. The LAStools software is used to compute for the elevation difference in the overlaps between strips and the point cloud density. It is a software package developed by Rapidlasso GmbH for filtering, tiling, classifying, rasterizing, triangulating and quality checking Terabytes of LiDAR data, using robust algorithms, efficient I/O tools and memory management. LAStools can quickly create raster representing the computed quantities, which provide guiding images in determining areas where further quality checks are necessary. The target requirements for floodplain acquisition, computed by LAStools, are shown in Table 4.

Table 4. Parameters Investigated During Quality Checks

Criteria	Requirement
Minimum per cent overlap	25%
Average point cloud density per square meter	2.0
Elevation difference between strips (on flat areas)	0.20 meters



# Methodology

---

LAStools can provide guides where elevation differences probably exceed the 20 centimeters limit. An example of LAStools output raster visualizing points in the flight line overlaps with a vertical difference of +/- 20 centimeters (displayed as dense red/blue areas) is shown in Figure 14.

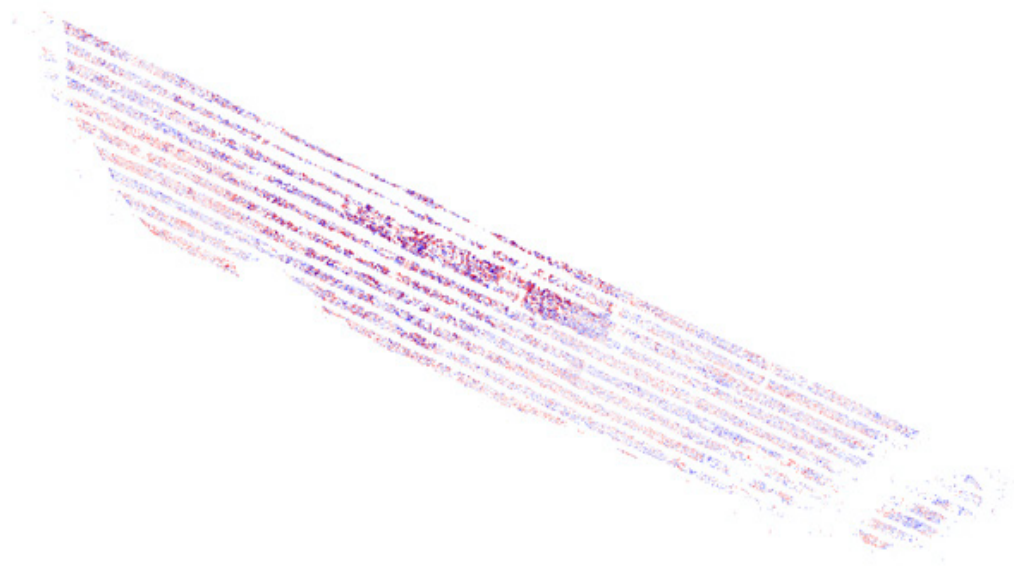


Figure 11. Elevation difference between flight lines generated from LAStools

To investigate the occurrences of elevation differences in finer detail, the profiling tool of Quick Terrain Modeler software is used. Quick Terrain Modeler (QT Modeler) is a 3D point cloud and terrain visualization software package developed by Applied Imagery, Inc. The profiling capability of QT Modeler is illustrated in Figure 12.

# Methodology

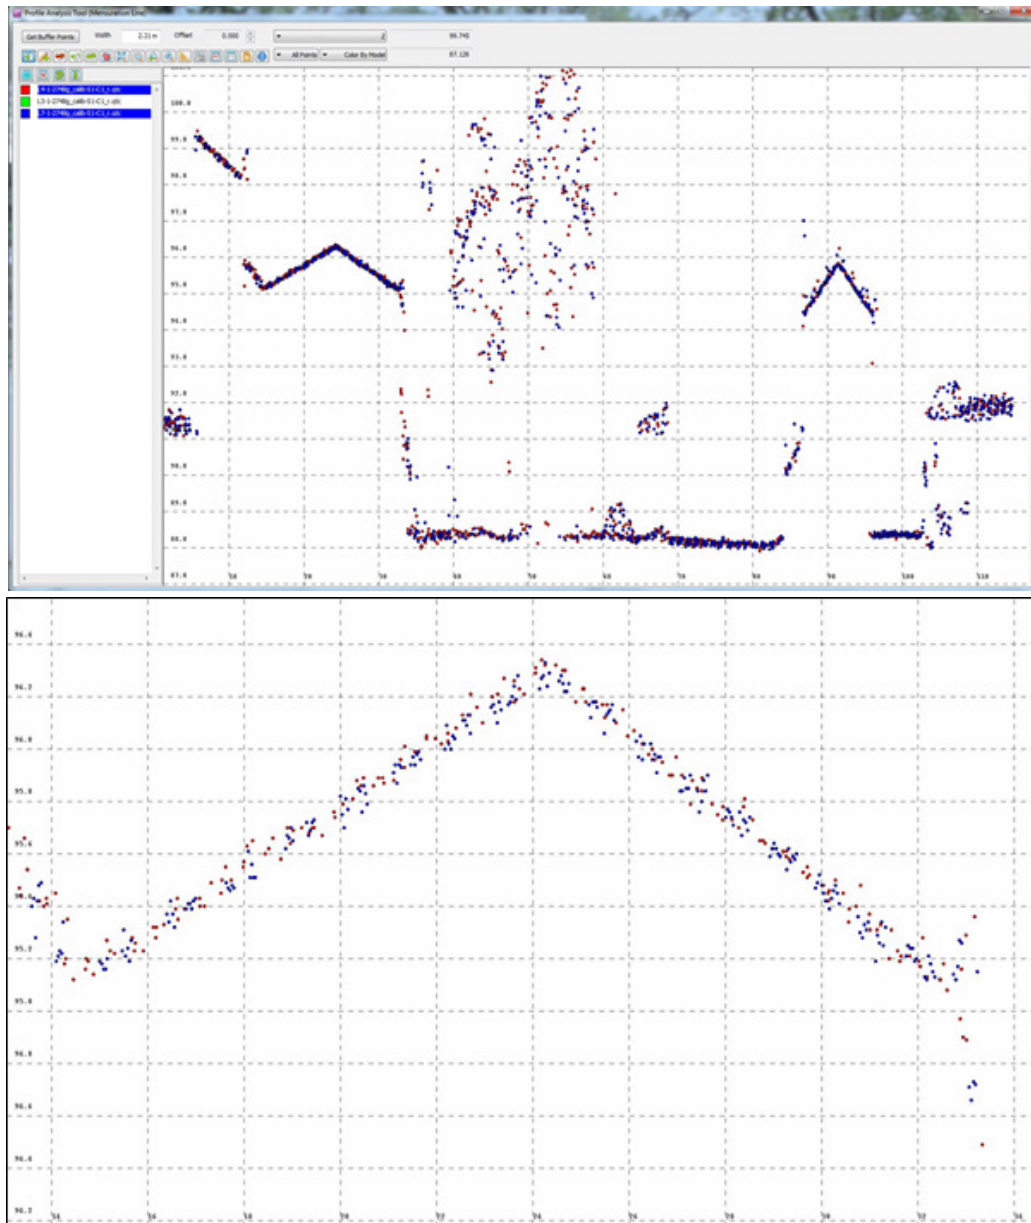


Figure 12. Profile over roof planes (a) and a zoomed-in profile on the area encircled in yellow (b)

The profile (e.g., over a roof plane) shows the overlapping points from different flight lines which serve as a good indicator that the correction applied by LMS for individual flight lines is good enough to attain the desired horizontal and vertical accuracy requirements. Flight lines that do not pass quality checking are subject for reprocessing in LMS until desired accuracies are obtained.

# Methodology

## 3.2.5 LiDAR Point Cloud Classification

Point cloud classification commences after the point cloud data has been rectified. TerraScan is a TerraSolid LiDAR software suite used for the classification of point clouds. It can read airborne and vehicle-based laser data in raw laser format, LAS, TerraScan binary or other ASCII-survey formats. Its classification and filtering routines are optimized by dividing the whole data into smaller geographical datasets called blocks, to automate the workflow and increase efficiency. In this study, the blocks were set to 1 kilometer by 1 kilometer with a 50-meter buffer zone to prevent edge effects.

The process includes the classification of all points into Ground, Low Vegetation, Medium Vegetation, High Vegetation and Buildings. The classifier tool in TerraScan first filters air points and low points by finding points that are 5 standard deviations away from the median elevation of a search radius, which is 5 meters by default. It then divides the region into 60 meters by 60 meters search areas (the maximum area where at least one laser point hits the ground) and assigns the lowest points in these areas as the initial ground points from which a triangulated ground model is derived. The classifier then iterates through all the points and adds the points to the ground model by testing if it is (a) within the maximum iteration angle of  $4^\circ$  by default from a triangle plane, and (b) if it is within the maximum iteration distance (1.2 meters by default) from a triangle plane. The ground plane is continuously updated from these iterations. The ground classification technique is illustrated in Figure 13. It is apparent that the smaller the iteration angle, the less eager the classifier is to follow changes in the point cloud (small undulations in terrain or hits on low vegetation). An angle close to  $4^\circ$  is used in flat terrain areas while an angle of  $10^\circ$  is used in mountainous or hilly terrains.

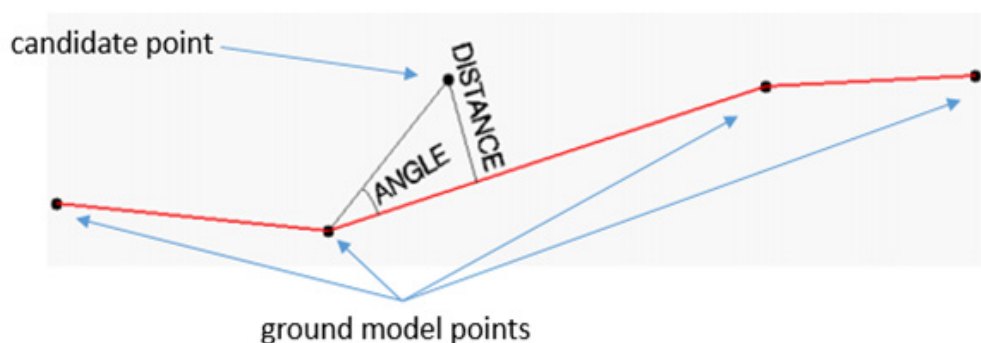


Figure 13. Ground classification technique employed in Terrascan

The parameters for ground classification routines used in floodplain and watershed areas are listed in Table 5.

Table 5. Ground Classification Parameters Used in Terrascan for Floodplain and Watershed Areas

Classification maximums	Floodplain (default)	Watershed (adjusted)
Iteration angle (degrees)	4	8
Iteration distance (meters)	1.20	1.50

# Methodology

The comparison between the produced DTM using the default parameters versus the adjusted is shown in Figure 14. The default parameters may fail to capture the sudden change in the terrain, resulting to less points being classified as ground that makes the DTM interpolated (Figure 14a). The adjusted parameters works better in these spatial conditions as shown in Figure 14b. Statistically, the number of ground points and model key points correctly classified can increase by as much as 50% when using the adjusted parameters.

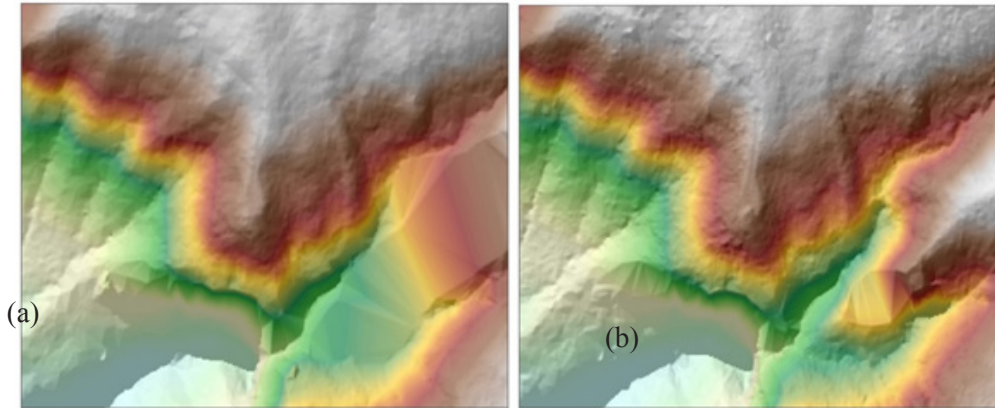


Figure 14. Resulting DTM of ground classification using the default parameters (a) and adjusted parameters (b)

The classification to Low, Medium and High vegetation is a straightforward testing of how high a point is from the ground model. The range of elevation values and its corresponding classification is shown in Table 6.

Table 6. Classification of Vegetation According to the Elevation of Points

Elevation of points (meters)	Classification
0.05 to 0.15	Low Vegetation
0.15 to 2.50	Medium Vegetation
2.50 to 50.0	High Vegetation

The classification to Buildings routine tests points above 2 meters if they only have one echo, and if they form a planar surface of at least 40 square meters with points adjacent to them. Minimum size and Z tolerance are the parameters used in the classify buildings routine as shown in Figure 15.

# Methodology

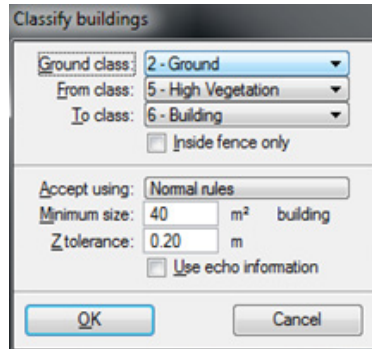


Figure 15. Default TerraScan building classification parameters

Minimum size is set to the smallest building footprint size of 40 square meters while the Z tolerance of 20 centimeters is the approximate elevation accuracy of the laser points.

The point cloud data are examined for possible occurrences of air points which are to be deleted manually in the TerraScan window. Air points are defined as groups of points which are significantly higher or lower from the ground points. The different examples of air points are shown in Figure 16.

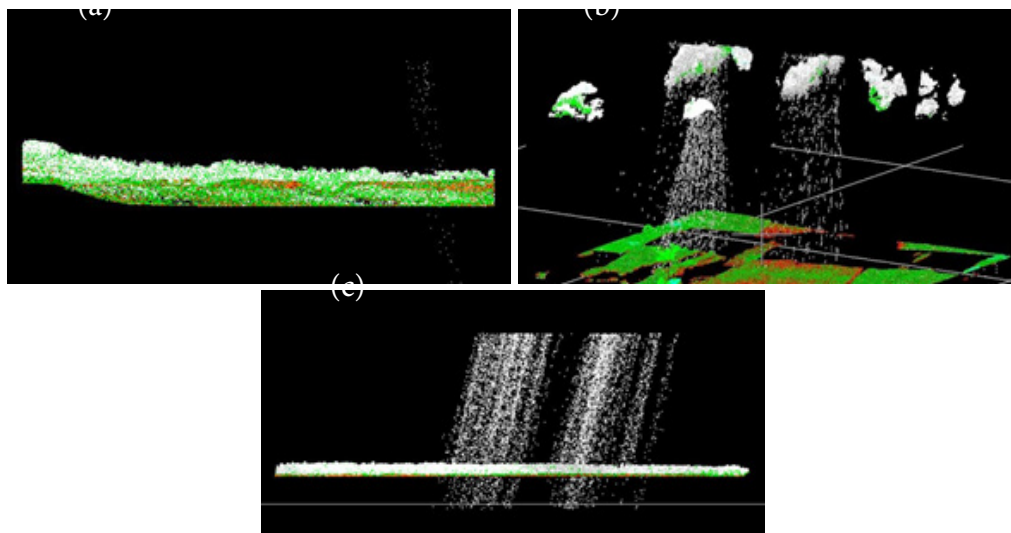


Figure 16. Different examples of air points manually deleted in the TerraScan window

The noise data can be as negligible as shown in Figure 16a or can be as severe as the one shown in Figure 16c. A combination of cloud points and shower of short ranges is displayed in Figure 16b. Shower of short ranges are caused by signal interference from the radio transmission of the tower and the aircraft. During every transmission on a specific frequency (around 120MegaHertz), the signal is getting distorted due to the interference causing showers of short ranges in the output LAS.

# Methodology

---

Classified LiDAR point clouds that are free of air points, noise and unwanted data are processed in TerraScan to produce Digital Terrain Model (DTM) and the corresponding first and last return Digital Surface Models (DSM). These ground models are produced in the American Standard Code for Information Interchange format (ASCII) format. DTMs are produced by rasterizing all points classified to ground and model key points in a 1 meter by 1 meter grid. The last return DSMs are produced by rasterizing all last returns from all classifications (Ground, Model Key Points, Low, Medium, High Vegetation, Buildings and Default) in a 1 meter by 1 meter grid. The first return DSMs on the other hand are produced by rasterizing all first returns from all classifications. Power lines are usually included in this model. All of these ground models are used in the mosaicking, manual editing and hydro correction of the topographic dataset, in preparation for the floodplain hydraulic modelling.

## 3.2.6 DEM Editing and Hydro-correction

Even though the parameters of the classification routines are optimized, various digital elevation models (DTM, first and last return DSM) that are automatically produced may still display minor errors that still need manual correction to make the DEMs suitable for fine-scale flood modelling. This is true especially for features that are under heavy canopy. Natural embankments on the side of the river might be flattened or misrepresented because no point pierced the canopy on that area. The same difficulty might also occur on smaller streams that are under canopy. The DTM produced might have discontinuities on these channels that might affect the flood modelling negatively. Manual inspection and correction is still a very important part of quality checking the LiDAR DEMs produced.

To correctly portray the dynamics of the flow of water on the floodplain, the river geometry must also be taken into consideration. The LiDAR data must be made consistent to the topographic surveys done for the area, and the bathymetric data must be “burned”, or integrated, into the DEM to make the dataset suitable for hydraulic analyses. However, no cross-sectional survey was performed for this area.





# Results and Discussions



# Results and Discussions

## 4.1 LiDAR Data Acquisition in Agusan Floodplain

### 4.1.1 Flight Plans

Plans were made to acquire LiDAR data within the Agusan floodplain. Each flight mission had an average of 15 flight lines and ran for at most 4 hours including take-off, landing and turning time. The parameter used in the LiDAR system for acquisition is found in Table 7.

Table 7. Parameters Used in LiDAR System During Flight Acquisition

Fixed Variables	Values		
Flying Height (AGL – Above Ground Level) (m)	750	1000	1200
Overlap	30 %	30 %	30 %
Max. field of View ( $\theta$ )	50	50	50
Speed of Plane (kts)	130	130	130
Turn around minutes	5	5	5
Swath (m)	661.58m	882m	1058.53m

The parameters that set in the LiDAR sensor to optimize the area coverage following the objectives of the project and to ensure the aircraft's safe return to the airport (base of operations) are shown in Table 7. Each flight acquisition is designed for four operational hours. The maximum flying hours for Cessna 206H is five hours.



# Results and Discussions

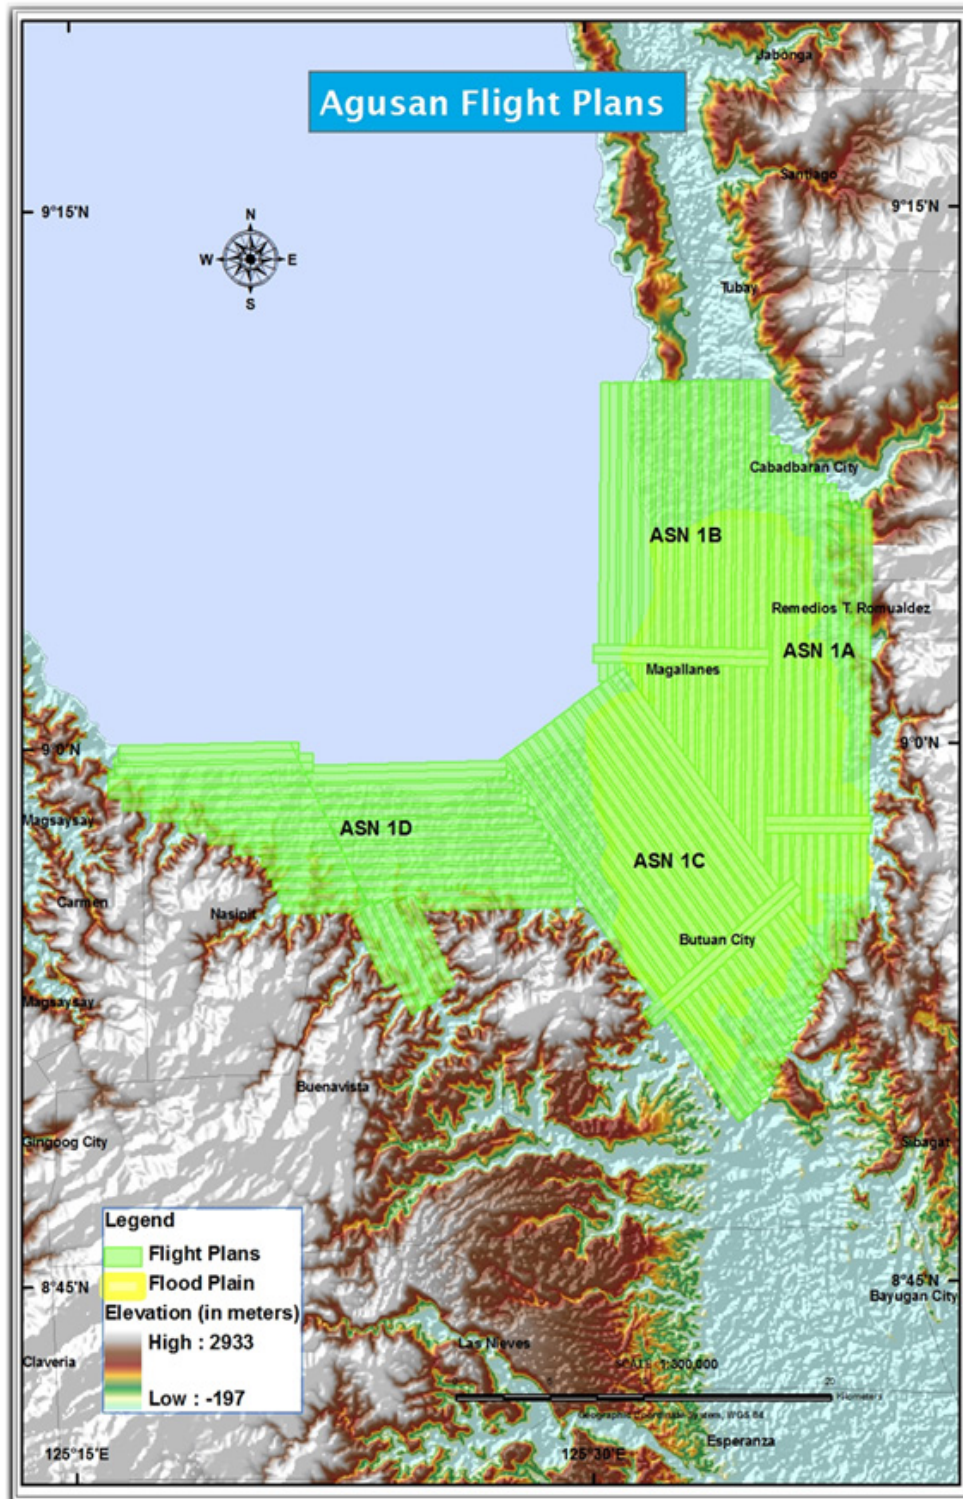


Figure 17. Agusan floodplain flight plans

# Results and Discussions

## 4.1.2 Ground Base Station

The project team used Butuan BM established by the Data Validation Component (DVC) located in Butuan City, Philippines. The certification for the base station is found in Annex D. The ground control point (GCP) was used as reference point during flight operations using TRIMBLE SPS R8, a dual frequency GPS receiver.

Table 8. Details of Butuan BM used as base station for the LiDAR Acquisition

Station Name	DVS-1	
Order of Accuracy	1st	
Relative Error (horizontal positioning)	1:10000	
Grid Coordinates, Universal Transverse Mercator Zone 51 North (UTM 51N WGS 1984)	Latitude	8° 56' 51.47071"
	Longitude	125° 32' 42.89474"
	Ellipsoidal Height	70.992 meters
	Elevation	2.717 meters



Figure 18. The DVC established control point Butuan BM under Marcos Bridge in Butuan City.

# Results and Discussions

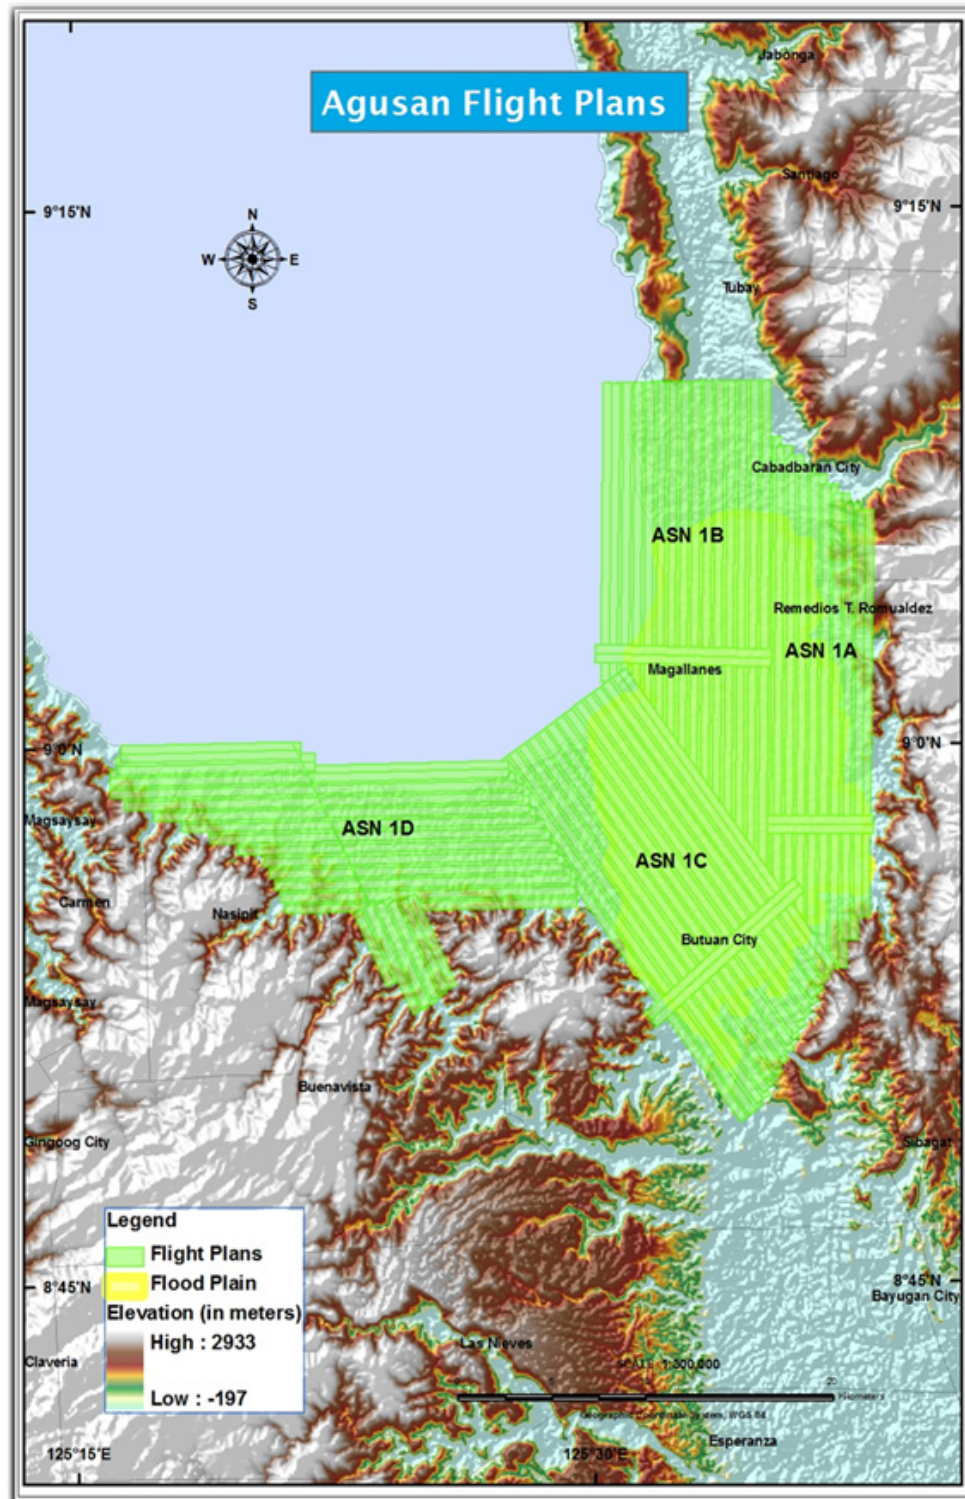


Figure 19. Agusan floodplain flight plans and base station

# Results and Discussions

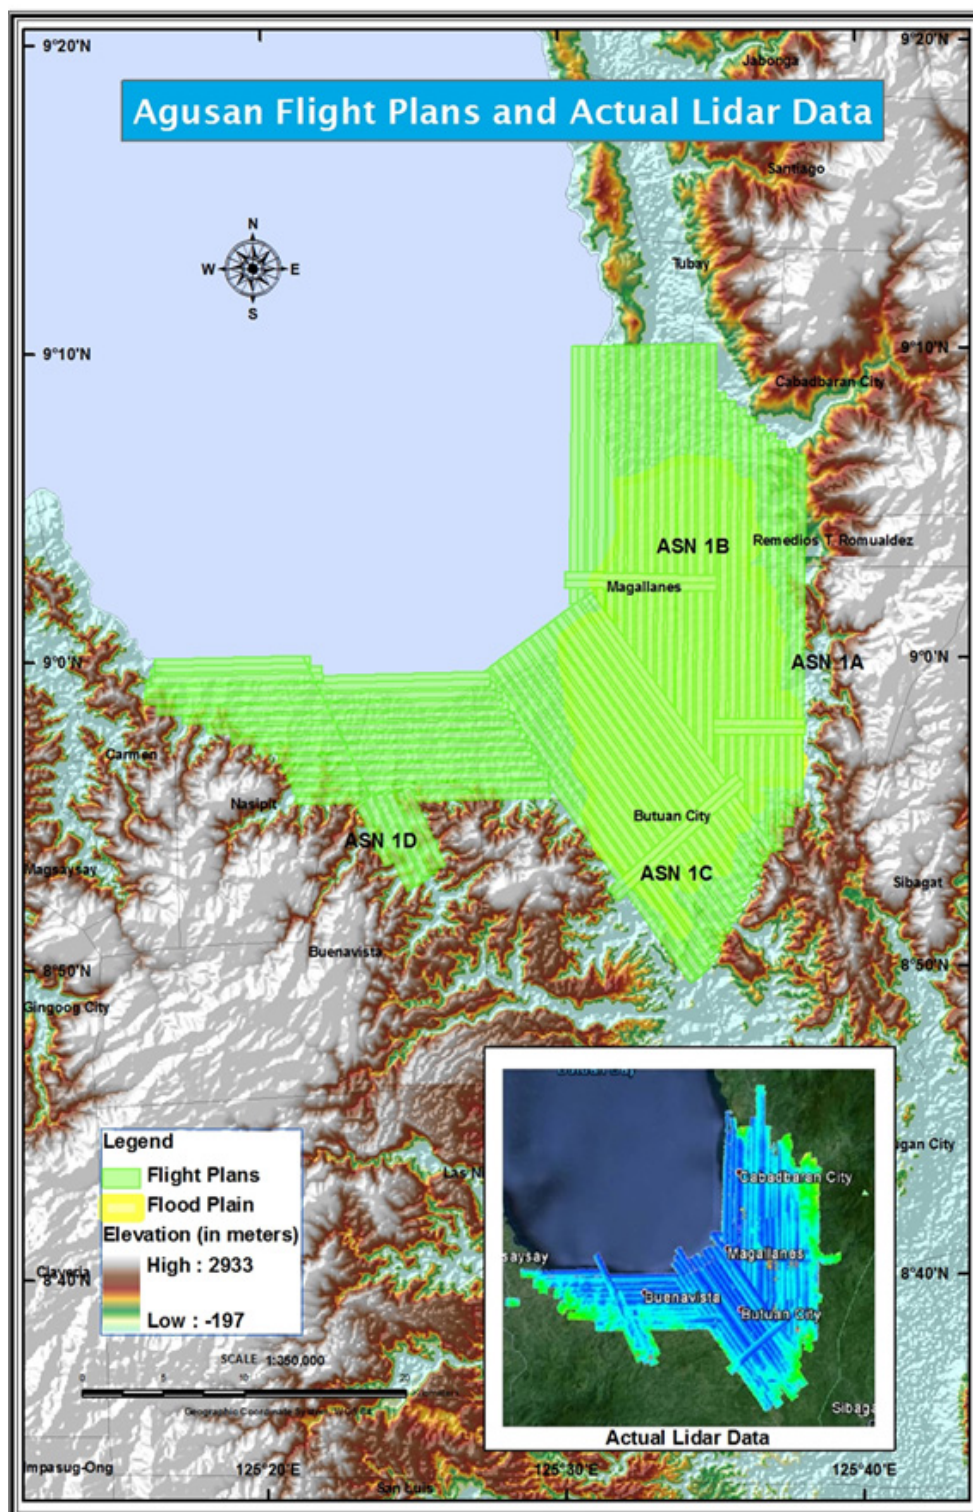


Figure 20. Agusan floodplain data acquisition LAS output

## Results and Discussions

Table 9. Flight Missions for LiDAR Data Acquisition in Agusan floodplain

Date Sur-veyed	Name	Flight Plan Area (km <sup>2</sup> )	Sur-veyed Area (km <sup>2</sup> )	Area Sur-veyed within the River Systems (km <sup>2</sup> )	Area Sur-veyed Outside the River Systems (km <sup>2</sup> )	No. of Images (Frames)	Flying Hours	
							Hours	Minutes
April 29, 2013	ASN 1A	140	197.17	163.89	33.28	380	3	50
May 1, 2013	ASN 1C	157.75	207.88	164.83	43.05	527	4	25
May 2, 2013	ASN 1B	145.44	202.81	90.85	111.96	536	4	35
May 3, 2013	ASN 1D	142	198.05	0	198.05	385	4	0

Four (4) missions were conducted to complete the LiDAR Data Acquisition in Agusan floodplain, for a total of sixteen hours and fifty minutes (16 hr. and 15 min.) of flying time for RP-C9022. All four (4) missions were acquired using the Pegasus LiDAR System. The total area to be surveyed according to the flight plan and the total area of actual coverage per mission is shown in Table 9.

Agusan floodplain with 262 square kilometers was completely surveyed from April 29, 2013 to May 3, 2013 by Jasmine Alviar and Mark Gregory V. Año as shown in Table 10.

Table 10. Area of Coverage of the LiDAR Data Acquisition in Agusan floodplain

Location	Date Sur-veyed	Opera-tor	Mission Name	Flood-plain Sur-veyed Area (km <sup>2</sup> )	Total Flood-plain Area (km <sup>2</sup> )	Water-shed Sur-veyed Area (km <sup>2</sup> )	Total Water-shed Area (km <sup>2</sup> )
Agusan	April 29, 2013	J. Alviar	1ASA119A	101.43	262	59.854	11,551.62
	May 1, 2013	M. Ano	1ASN-1C120A	104.54		56.756	
	May 2, 2013	J. Alviar	1ASD121A	56.03		57.638	
	May 3, 2013	M. Ano	1ASN-1S122A				

# Results and Discussions

## 4.2 LiDAR Data Processing

### 4.2.1 Trajectory Computation

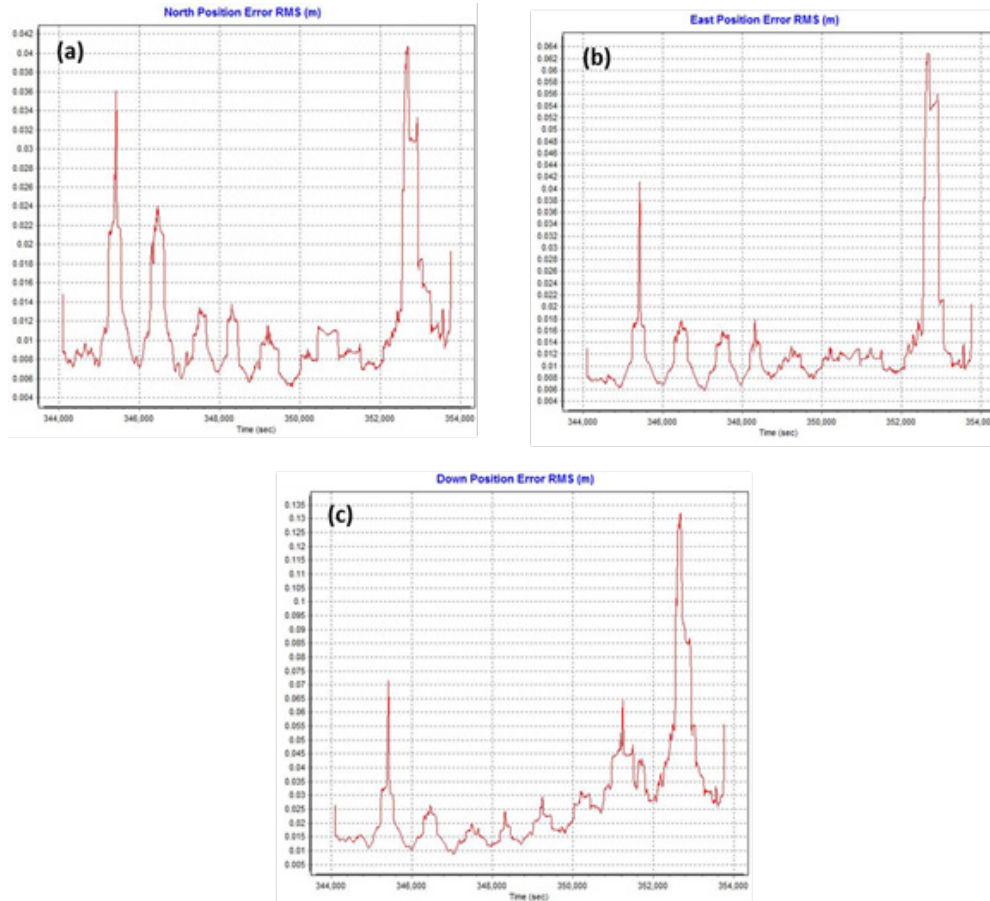


Figure 21. Smoothed Performance Metric Parameters of Agusan flight

The Smoothed Performance Metric parameters of the Agusan flight are shown in Figure 21. The x-axis is the time of flight, which is measured by the number of seconds from the midnight of the start of the GPS week. The y-axis is the RMSE value for a particular aircraft position with respect to GPS survey time. The North (Figure 21a) and east (Figure 21b) position RMSE values fall within the prescribed accuracy of 4 centimeters, and all Down (Figure 21c) position RMSE values fall within the prescribed accuracy of 8 centimeters.

# Results and Discussions

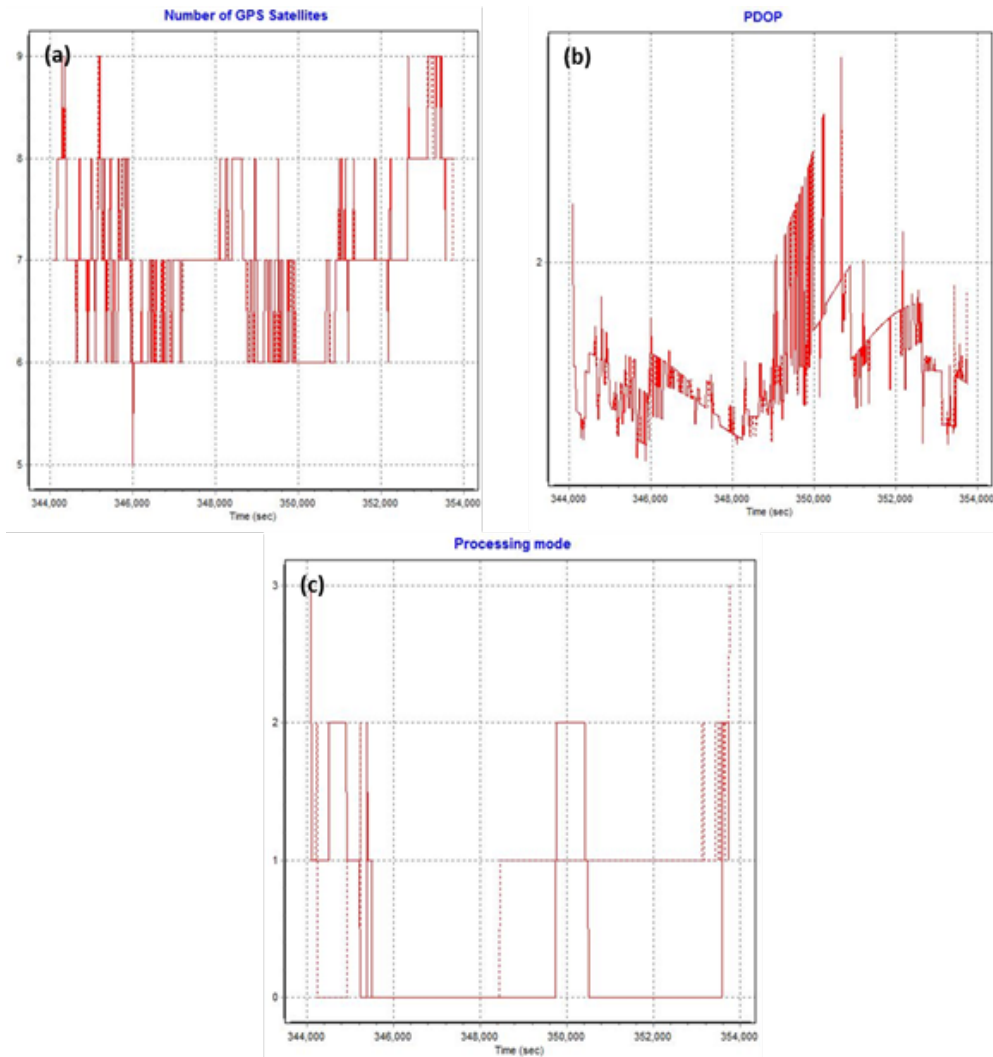


Figure 22. Solution Status Parameters of Agusan flight

The Solution Status parameters of the computed trajectory for Agusan flight, which are the number of GPS satellites, Positional Dilution of Precision (PDOP), and the GPS processing mode used are shown in Figure 22. The processing mode (Figure 22a) stays at a value of 0, which corresponds to a Fixed, Narrow-Lane mode, which indicates an optimum solution for trajectory computation by POSPac MMS v6.2. The PDOP (Figure 22b) value does not exceed the value of 3, indicating optimal GPS geometry. The number of GPS satellites (Figure 22c) graph indicates that the number of satellites during the acquisition was between 7 and 9. All of the parameters satisfied the accuracy requirements for optimal trajectory solutions as indicated in the methodology.



# Results and Discussions

## 4.2.2 LiDAR Point Cloud Computation

The LAS data output contains 19 flight lines, with each flight line containing two channels, a feature of the Pegasus system. The result of the boresight correction standard deviation values for both channel 1 and channel 2 are better than the prescribed  $0.001^\circ$ . The position of the LiDAR system is also accurately computed since all GPS position standard deviations are less than 0.04 meter. The attitude of the LiDAR system passed accuracy testing since the standard deviation of the corrected roll and pitch values of the IMU attitudes are less than  $0.001^\circ$ .

## 4.2.3 LiDAR Data Quality Checking

The LAS boundary of the LiDAR data on top of the SRTM elevation data is shown in Figure 23. The map shows gaps in the LiDAR coverage that are attributed to cloud cover present during the survey.

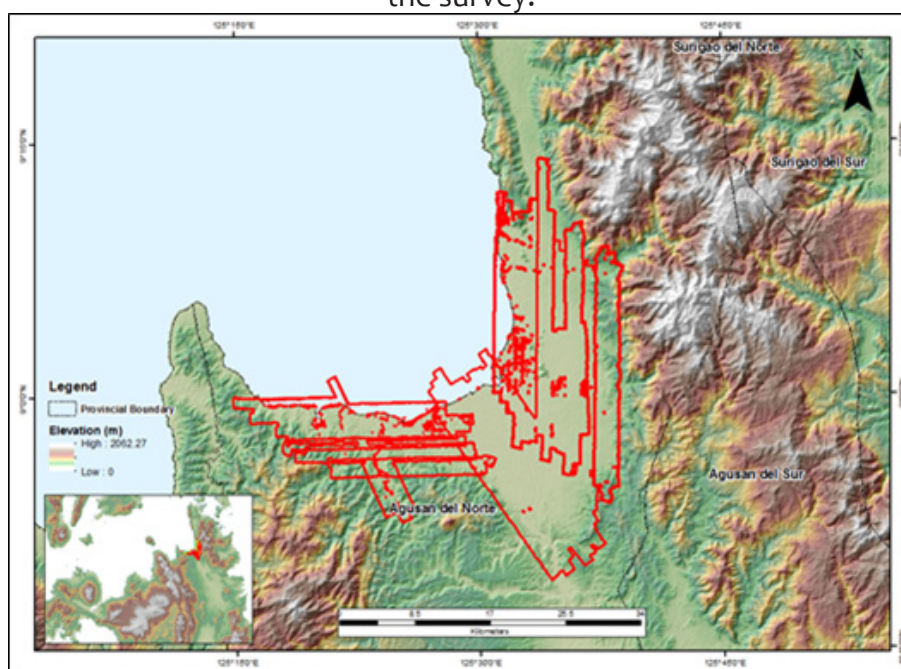


Figure 23. Coverage of LiDAR data for the Agusan mission

The overlap data for the merged LiDAR data showing the number of channels that pass through a particular location is shown in Figure 24. Since the Pegasus system employs two channels, an average value of 2 (blue) for areas where there are only two overlapping flight lines, and a value of 3 (yellow) or more (red) for areas with three or more overlapping flight lines, are expected. The average data overlap for Agusan is 34.63%.

# Results and Discussions

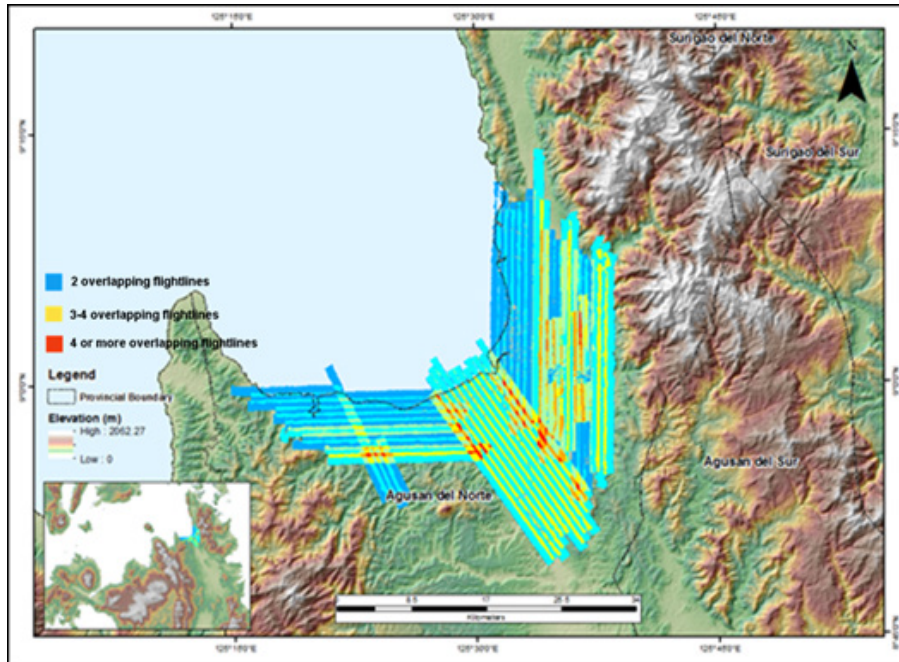


Figure 24. Image of data overlap for the Agusan mission

The density map for the merged LiDAR data, with the red areas showing the portions of the data that satisfy the 2 points per square meter requirement, is shown in Figure 25. It was determined that 25.83% of the total area satisfied the point density requirement, and the average density for the entire survey area is 2.29 points per square meter.

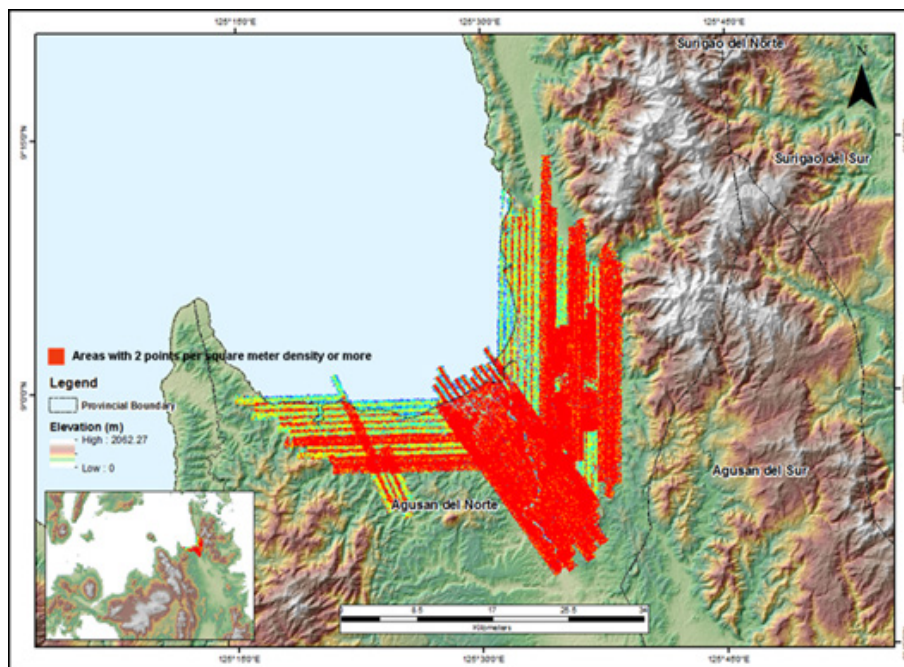


Figure 25. Density map of merged LiDAR data for the Agusan mission

## Results and Discussions

The elevation difference between overlaps of adjacent flight lines is shown in Figure 26. The default color range is from blue to red, where bright blue areas correspond to a -0.20 meter difference, and bright red areas correspond to a +0.20 meter difference. Areas with bright red or bright blue need to be investigated further using QT Modeler.

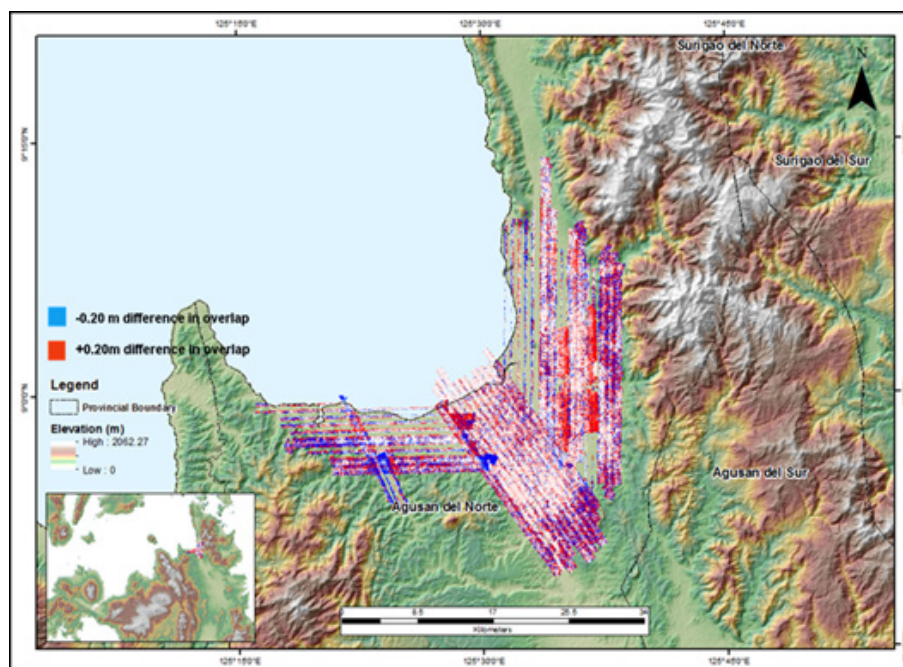


Figure 26. Elevation difference map between flight lines

A screen capture of the LAS data loaded in QT Modeler is shown in Figure 27a. A line graph showing the elevations of the points from all of the flight strips traversed by the profile in red line is shown in Figure 27b. It is evident that there are differences in elevation, but the differences do not exceed the 20 centimeters mark. No reprocessing was necessary for this LiDAR dataset.

# Results and Discussions

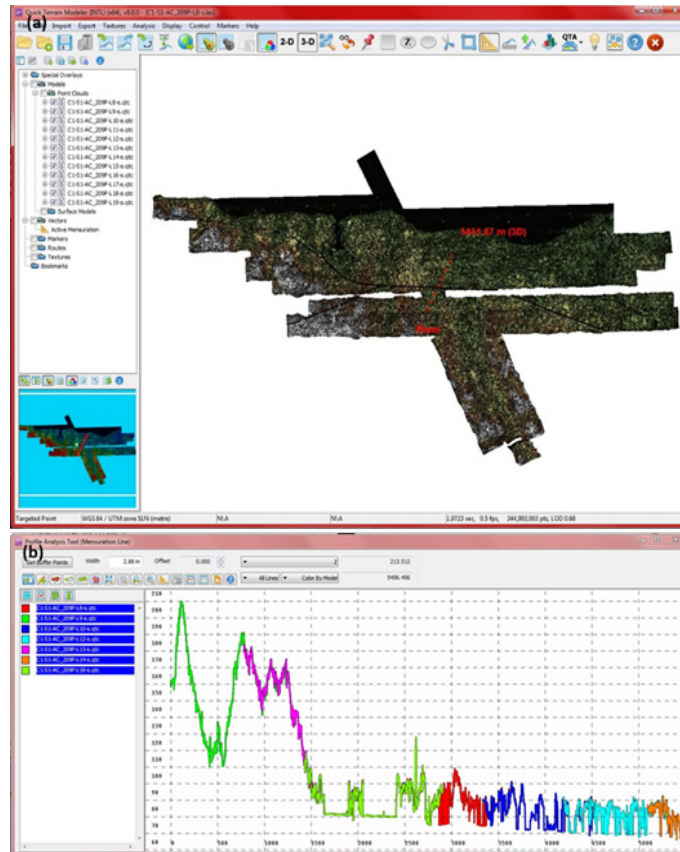


Figure 27. Quality checking with the profile tool of QT Modeler

## 4.2.4 LiDAR Point Cloud Classification and Rasterization

The block system that TerraScan employed for the LiDAR data is shown in Figure 28a generated a total of 1,181 1 kilometer by 1 kilometer blocks. The final classification of the point cloud for a mission in the Agusan floodplain is shown in Figure 28b. The number of points classified to the pertinent categories along with other information for the mission is shown in Table 11.

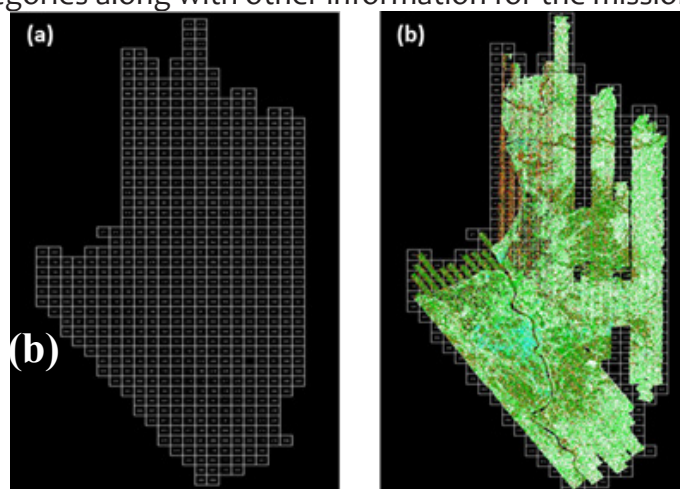


Figure 28. (a) Agusan floodplains and (b) Agusan classification results in TerraScan

# Results and Discussions

Table 11. Agusan classification results in TerraScan

Pertinent Class	Count
Ground	356,527,448
Low Vegetation	356,508,626
Medium Vegetation	438,146,723
High Vegetation	446,518,927
Building	24,812,727
Number of 1km x 1km blocks	1,181
Maximum Height	683.82m
Minimum Height	56.25m

An isometric view of an area before (a) and after (b) running the classification routines for the mission is shown in Figure 29. The ground points are in brown, the vegetation is in different shades of green, and the buildings are in cyan. It can be seen that residential structures adjacent or even below canopy are classified correctly, due to the density of the LiDAR data.

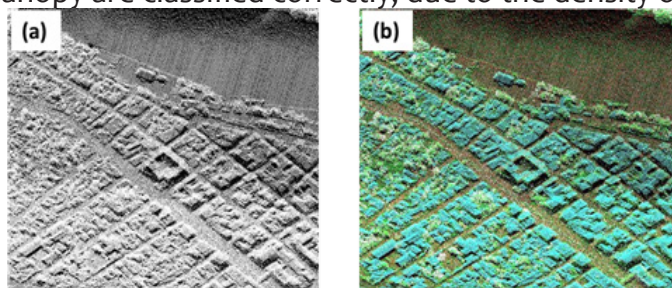


Figure 29. Point cloud (a) before and (b) after classification

## 4.2.5 DEM Editing and Hydro-correction

Portions of DTMs before and after manual editing are shown in Figure 30. It shows that the embankment might have been drastically cut by the classification routine in Figure 30a and clearly needed to be retrieved to complete the surface as in Figure 30b to allow to hydrologically correct flow of water. A small stream suffers from discontinuity of flow due to an existing bridge in Figure 30c. The bridge is removed also in order to hydrologically correct the flow of water through the river in Figure 30d.

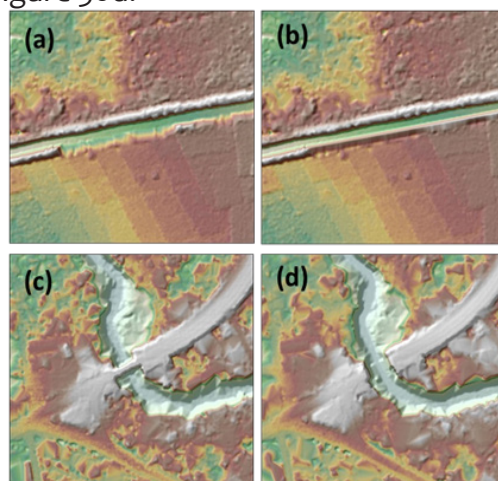


Figure 30. Images of DTMs before and after manual editing

# Results and Discussions

The extent of the validation survey done by the Data Validation Component (DVC) in Agusan to collect points with which the LiDAR dataset is validated is shown in Figure 31. A total of 4,990 control points were collected. The good correlation between the airborne LiDAR elevation values and the ground survey elevation values, which reflects the quality of the LiDAR DTM is shown in Figure 32. The computed RMSE between the LiDAR DTM and the surveyed elevation values is 12.949 centimeters with a standard deviation of 12.948 centimeters. The LE 90 value represents the linear vertical distance that 90% of the sampled DEM points and their respective DVC validation point counterparts should be found from each other. Other statistical information can be found in Table 12. The final DTM and extent of the bathymetric survey done along the river is shown in Figure 33.

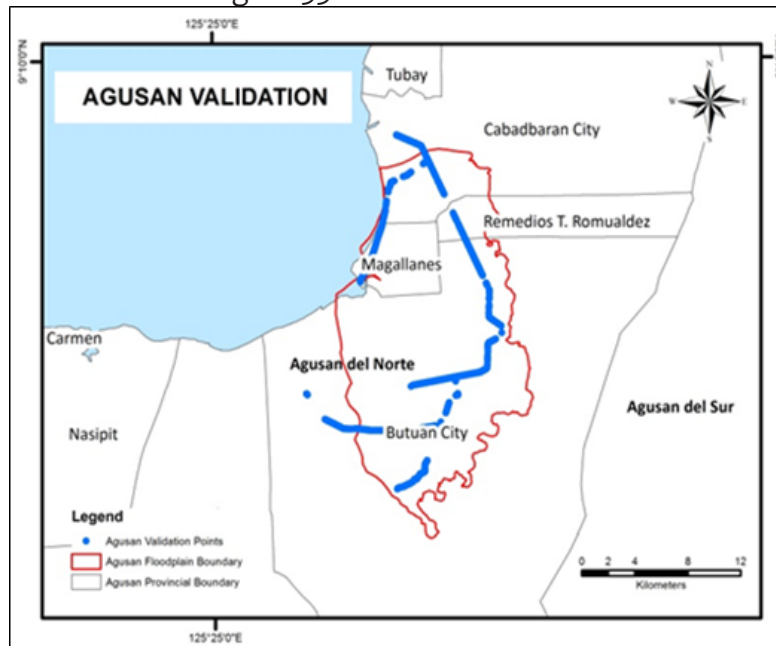


Figure 31. Map of Agusan River System with validation survey shown in blue

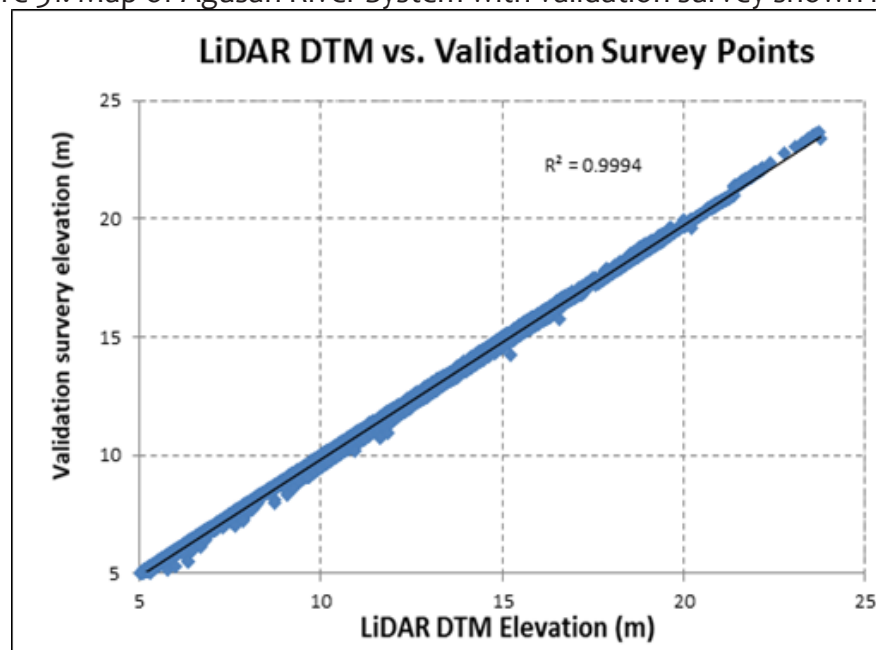


Figure 32. One-one Correlation plot between topographic and LiDAR data

# Results and Discussions

Table 12. Statistical values for the calibration of flights

Statistical Information (cm)	Values
Min	-18.843
Max	-12
RMSE	12.949
Standard Deviation	12.948
LE90	9.772

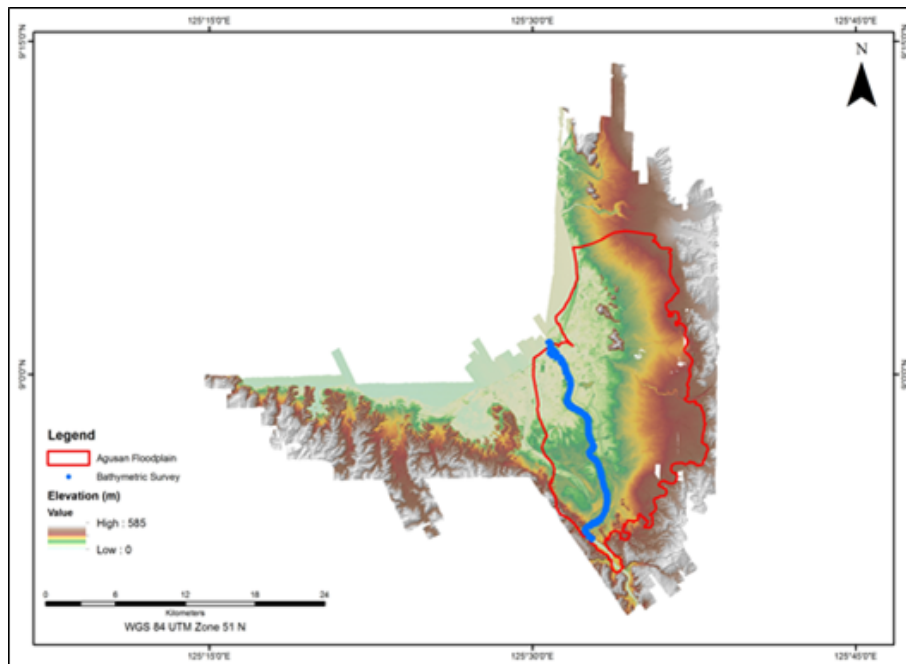


Figure 33. Final DTM of Agusan with validation survey shown in blue

The floodplain extent for Agusan is also presented, showing the completeness of the LiDAR dataset and DSM produced, is shown in Figure 34. Samples of 1 kilometer by 1 kilometer of DSM and DTM are shown in Figure 35 and Figure 36, respectively.

# Results and Discussions

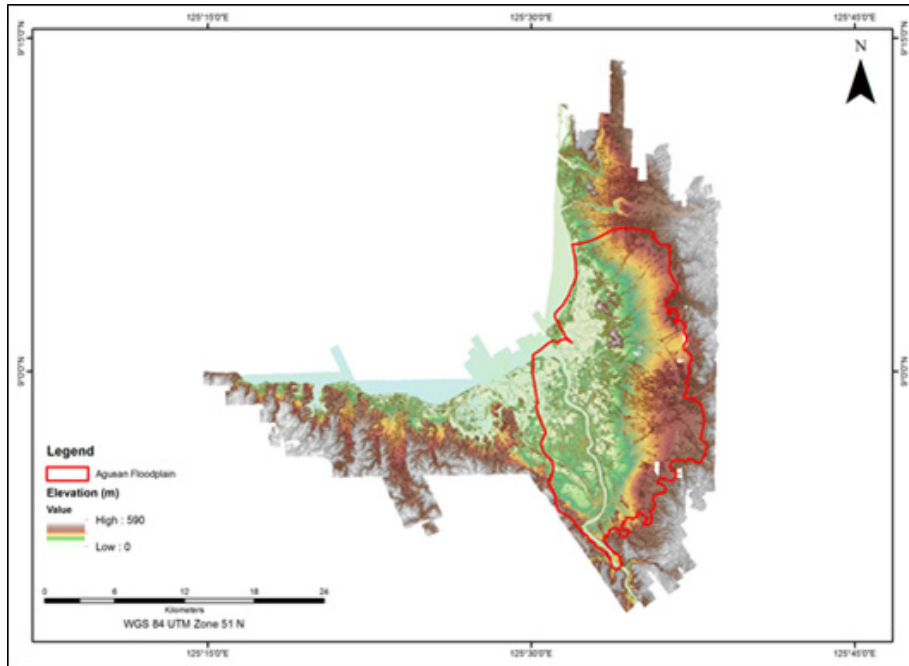


Figure 34. Final DSM in Agusan

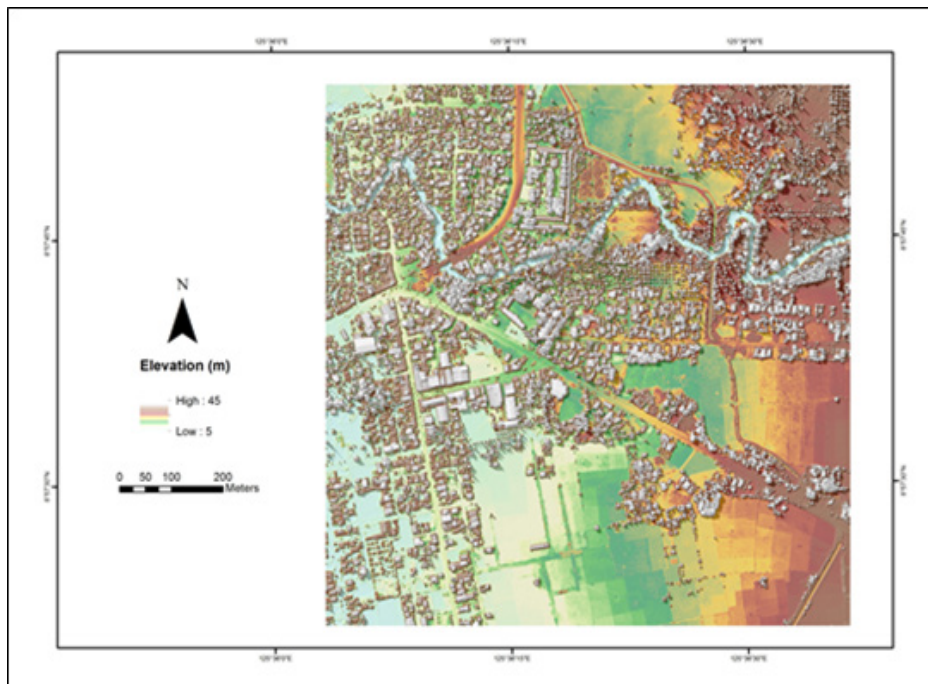


Figure 35. Sample 1x1 square kilometer DSM



# Results and Discussions

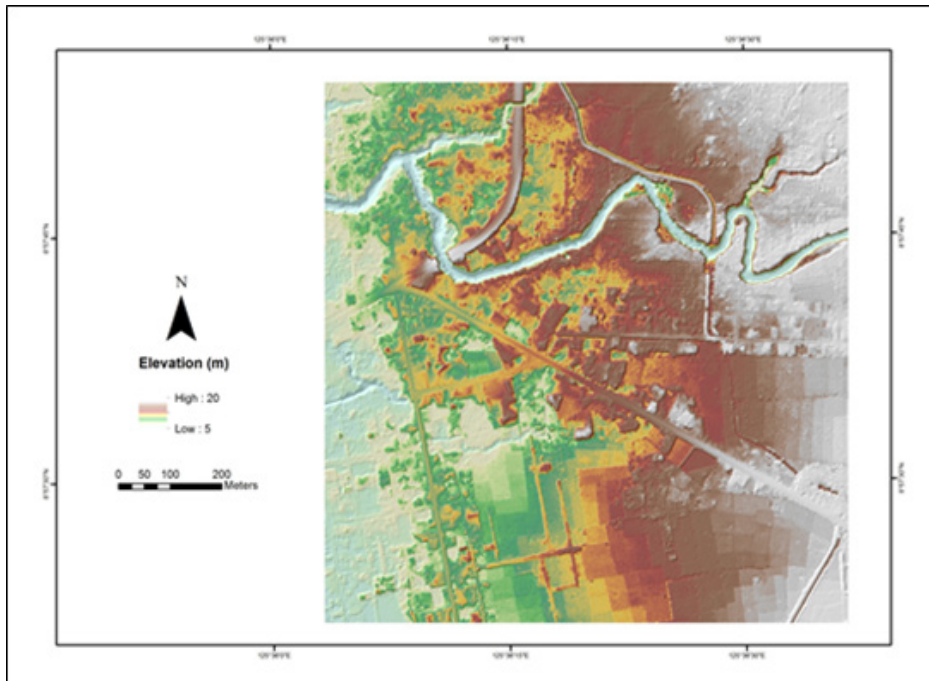


Figure 36. Sample 1x1 square kilometer DTM

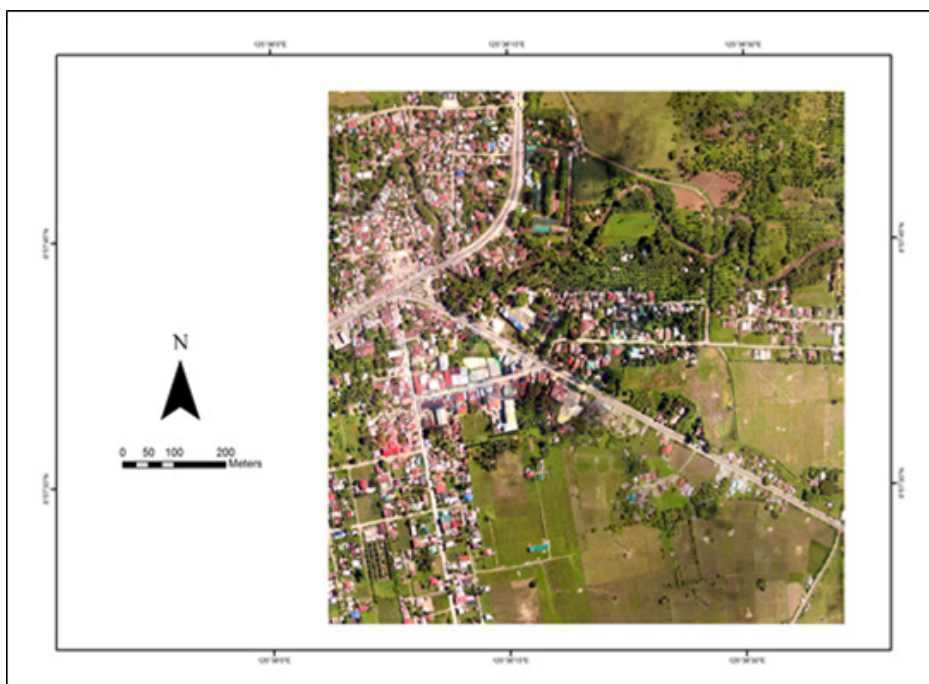


Figure 37. Sample 1x1 ortho map.



# Annexes

## ANNEX A. OPTECH TECHNICAL SPECIFICATION OF THE PEGASUS SENSOR

Parameter	Specification
Operational envelope (1,2,3,4)	150-5000 m AGL, nominal
Laser wavelength	1064 nm
Horizontal accuracy (2)	1/5,500 x altitude, 1 $\sigma$
Elevation accuracy (2)	< 5-20 cm, 1 $\sigma$
Effective laser repetition rate	Programmable, 100-500 kHz
Position and orientation system	POS AV™AP50 (OEM)
Scan width (FOV)	Programmable, 0-75°
Scan frequency (5)	Programmable, 0-140 Hz (effective)
Sensor scan product	800 maximum
Beam divergence	0.25 mrad (1/e)
Roll compensation	Programmable, $\pm 37^\circ$ (FOV dependent)
Vertical target separation distance	<0.7 m
Range capture	Up to 4 range measurements, including 1st, 2nd, 3rd, and last returns
Intensity capture	Up to 4 intensity returns for each pulse, including last (12 bit)
Image capture	5 MP interline camera (standard); 60 MP full frame (optional)
Full waveform capture	12-bit Optech IWD-2 Intelligent Waveform Digitizer
Data storage	Removable solid state disk SSD (SATA II)
Power requirements	28 V, 800 W, 30 A
Dimensions and weight	Sensor: 630 x 540 x 450 mm; 65 kg;
	Control rack: 650 x 590 x 490 mm; 46 kg
Operating Temperature	-10°C to +35°C
Relative humidity	0-95% non-condensing

## ANNEX B. OPTECH TECHNICAL SPECIFICATION OF THE D-8900 AERIAL DIGITAL CAMERA

Parameter	Specification
Camera Head	
Sensor type	60 Mpix full frame CCD, RGB
Sensor format (H x V)	8, 984 x 6, 732 pixels
Pixel size	6µm x 6 µm
Frame rate	1 frame/2 sec.
FMC	Electro-mechanical, driven by piezo technology (patented)
Shutter	Electro-mechanical iris mechanism 1/125 to 1/500++ sec. f-stops: 5.6, 8, 11, 16
Lenses	50 mm/70 mm/120 mm/210 mm
Filter	Color and near-infrared removable filters
Dimensions (H x W x D)	200 x 150 x 120 mm (70 mm lens)
Weight	~4.5 kg (70 mm lens)
Controller Unit	
Computer	Mini-ITX RoHS-compliant small-form-factor embedded computers with AMD Turion™ 64 X2 CPU  4 GB RAM, 4 GB flash disk local storage  IEEE 1394 Firewire interface
Removable storage unit	~500 GB solid state drives, 8,000 images
Power consumption	~8 A, 168 W
Dimensions	2U full rack; 88 x 448 x 493 mm
Weight	~15 kg
Image Pre-Processing Software	
CaptureOne	Radiometric control and format conversion, TIFF or JPEG
Image output	8,984 x 6,732 pixels 8 or 16 bits per channel (180 MB or 360 MB per image)


## ANNEX C. THE SURVEY TEAM

Data Acquisition Component Sub-team	Designation	Name	Agency/ Affiliation
Data Acquisition Component Leader	Data Component Project Leader –I	ENGR. CZAR JAKIRI S. SARMIENTO	UP TCAGP
Survey Supervisor	Chief Science Research Specialist (CSRS)	ENGR. CHRISTOPHER CRUZ	UP TCAGP
LiDAR Operation	Senior Science Research Specialist	MARK GREGORY AÑO	UP TCAGP
	Research Associate	JASMINE ALVIAR	UP TCAGP
Ground Survey	Research Associate	ENGR. GEROME HIPOLITO	UP TCAGP
Data Download and Transfer	Research Associate	CHRISTOPHER JOAQUIN	UP TCAGP
LiDAR Operation	Airborne Security	SSG. PRADYUMNA DAS RAMIREZ	Philippine Air Force (PAF)
LiDAR Operation	Pilot	CAPT. JAMAAL CLEMENTE	AEROSPACE CORP (AAC)
LiDAR Operation	Co-pilot	CAPT. MARK TANGONAN	AAC

## ANNEX D. NAMRIA CERTIFICATIONS

AN-54

	Republic of the Philippines Department of Environment and Natural Resources <b>NATIONAL MAPPING AND RESOURCE INFORMATION AUTHORITY</b>	
April 05, 2013		
<b>CERTIFICATION</b>		
To whom it may concern:		
This is to certify that according to the records on file in this office, the requested survey information is as follows -		
<b>Province: AGUSAN DEL NORTE</b> <b>Station Name: AN-54</b>		
Island: <b>Mindanao</b>	Municipality: <b>BUTUAN CITY (CAPITAL)</b>	Barangay: <b>ANTONGALON</b>
Elevation: <b>20.5662 m.</b>	Order: <b>1st Order</b>	Datum: <b>Mean Sea Level</b>
Location Description		
ACCESS: "AN-54" is in Barangay Antongalon, Butuan City, Agusan Del Norte. Station is located 10 cm. south of the kilometer post KM. 1235 north of Iglesia Ni Kristo.		
STATION MARK: Mark is the head of 4" copper nail embedded in 0.30x0.30x1.0 m. concrete monument with the inscription "AN-54 2007 NAMRIA".		
Requesting Party: <b>UP-TCAGP</b>	 <b>RUEL M. BELEN, MNSA</b> Director, Mapping and Geodesy Department	
Purpose: <b>Reference</b>		
OR Number: <b>3943485 B</b>		
T.N.: <b>2013-0269</b>		
 9 9 0 4 0 5 2 0 1 3 1 5 5 2 2 9		
	<b>NAMRIA OFFICES:</b> Main : Lawton Avenue, Fort Bonifacio, 1634 Taguig City, Philippines Tel. No.: (632) 810-4831 to 41 Branch : 421 Barroca St. San Nicolas, 1010 Manila, Philippines, Tel. No. (632) 241-3494 to 98 <a href="http://www.namria.gov.ph">www.namria.gov.ph</a>	



Republic of the Philippines  
Department of Environment and Natural Resources  
**NATIONAL MAPPING AND RESOURCE INFORMATION AUTHORITY**

June 11, 2013

### CERTIFICATION

To whom it may concern:


This is to certify that according to the records on file in this office, the requested survey information is as follows -

<b>Province: AGUSAN DEL NORTE</b>		
<b>Station Name: AGN-204</b>		
<b>Order: 2nd</b>		
Island: <b>MINDANAO</b>	Barangay: <b>TALIGAMAN</b>	
Municipality: <b>BUTUAN CITY (CAPITAL)</b>	<b>PRS92 Coordinates</b>	
Latitude: <b>8° 56' 19.64993"</b>	Longitude: <b>125° 37' 47.98982"</b>	Ellipsoidal Hgt: <b>27.80400 m.</b>
<b>WGS84 Coordinates</b>		
Latitude: <b>8° 56' 16.03323"</b>	Longitude: <b>125° 37' 53.34384"</b>	Ellipsoidal Hgt: <b>96.87400 m.</b>
<b>PTM Coordinates</b>		
Northing: <b>988428.048 m.</b>	Easting: <b>569283.505 m.</b>	Zone: <b>5</b>
<b>UTM Coordinates</b>		
Northing: <b>989,054.86</b>	Easting: <b>789,222.64</b>	Zone: <b>51</b>


Location Description

AGN-204  
From Ampayon junction, travel 4 km E along the national road to Davao. The station is located on the concrete corner fence of Taligaman Elementary School, about 15 m away from the centerline of the road and 38.78 m west from the main gate. Mark is the head of a 3" copper nail flushed in a cement block embedded on the ground with inscriptions "AGN-204 2007 NAMRIA".


Requesting Party:	<b>UP-TCAGP DREAM</b>
Purpose:	<b>Reference</b>
OR Number:	<b>3943775B</b>
T.N.:	<b>2013-0558</b>



**RUEL M. BELEN, MNSA**  
Director, Mapping and Geodesy Department



9 9 0 6 1 1 2 0 1 3 1 5 0 2 5 6



CERTIFICATION INTERNATIONAL  
ISO 9001:2008  
CIP/4701/12/09/814

NAMRIA OFFICES:  
Main : Lawton Avenue, Fort Bonifacio, 1634 Taguig City, Philippines Tel. No. (632) 810-4831 to 41  
Branch : 421 Barraco St. San Nicolas, 1010 Manila, Philippines, Tel. No. (632) 241-3494 to 98  
[www.namria.gov.ph](http://www.namria.gov.ph)







## ANNEX F. FLIGHT LOGS

1.

### Flight Log for 1ASA119A Mission

DREAM Data Acquisition Flight Log										Flight Log No.: 203	
1 LIDAR Operator: J. Alvar	2 ALTM Model: Pegasus	3 Mission Name: 1ASA 119A	4 Type: VFR	5 Aircraft Type: Cessna T206H	6 Aircraft Identification: FIP C4022						
7 Pilot: J. Clavante	8 Co-Pilot: M. Tanguen	9 Route: Cbo - Buthuan - CDO	10 Date: April 29, 2013	11 Airport of Arrival (Airport, City/Province): CDO	12 Airport of Departure (Airport, City/Province): CDO						
13 Engine On: 0735 H	14 Engine Off: 1125H	15 Total Engine Time: 3 h 50	16 Take off:	17 Landing:	18 Total Flight Time:						
19 Weather: partly cloudy. fast build up of clouds											
20 Remarks: mission not completed due to clouds											
21 Problems and Solutions:											
: from B report , clouds											
Acquisition Flight Approved by <i>M. Tanguen</i> Signature over Printed Name (End User Representative)		Acquisition Flight Certified by <i>Sgt Rodolfo Reyes PAF</i> Signature over Printed Name (PAF Representative)		Pilot-in-Command <i>J. Clavante</i> Signature over Printed Name		Lidar Operator <i>J. Alvar</i> Signature over Printed Name					



DREAM  
Disaster Risk Exposure and Assessment for Mitigation



# Annexes

2.

## Flight Log for 1ASN1C120A Mission

209  
Flight Log No.: 2051

DREAM Data Acquisition Flight Log

1 LIDAR Operator: Mark Aho	2 ALTM Model: Dagepac	3 Mission Name: 1ASN1C120A	4 Type: VFR	5 Aircraft Type: Casina T206H	6 Aircraft Identification: RP-C172
7 Pilot: J. Clemente	8 Co-Pilot: M. Fajerman	9 Route: CDO - Aguas	12 Airport of Arrival (Airport, City/Province): CDO	17 Landing: 1625	18 Total Flight Time: 11-00
10 Date: 01 May 2013	12 Airport of Departure (Airport, City/Province): CDO	15 Total Engine Time: 1125	16 Take off: 0625		
13 Engine On: 0610	14 Engine Off: 1625	19 Weather: partly cloudy			
20 Remarks: Survey ok mission complete.					
21 Problems and Solutions:					

Acquisition Flight Approved by

Mark Aho

Signature over Printed Name  
(End User Representative)

Acquisition Flight Certified by

Scott Fitch

Signature over Printed Name  
(PAF Representative)

Pilot-in-Command


[Signature]

Signature over Printed Name

Lidar Operator

Mark Aho

Signature over Printed Name







**DREAM**

Director RNA Systems and Aircraft Technology

3.

## Flight Log for 1ASD121A Mission

1 <sup>st</sup> TEAM Data Acquisition Flight Log				Flight Log No: 309	
1 LIDAR Operator: J. Alvarado	2 ALTM Model: Pegasus	3 Mission Name: IAspiza	4 Type: VFR	5 Aircraft Type: Cessna120BH	6 Aircraft Identification: RP-29022
7 Pilot: J. Alvarado	8 Co-Pilot: M. Tangshan	9 Route: CDO - Buhuan			
10 Date: 02 May 2013	11 Airport of Departure (Airport, City/Province): CDO	12 Airport of Arrival (Airport, City/Province): CDO	16 Take off: 0655H	17 Landing: 1055H	18 Total Flight Time: 4:00
13 Engine On: 0640H	14 Engine Off: 1115H	15 Total Engine Time: 4:35			
19 Weather: partly cloudy					
20 Remarks: mission completed. phase refer to electronic copy of ground log. * survey areas are half of B and D					
21 Problems and Solutions:					
<p>Acquisition Flight Approved by                        Mark A. Xie                      Signature over Printed Name                      (End User Representative)</p> <p>Acquisition Flight Certified by                        Sgt. Frank James                      Signature over Printed Name                      (PIF Representative)</p> <p>Pilot-in-Command                        J. Alvarado                      Signature over Printed Name</p> <p>Lidar Operator                        J. Alvarado                      Signature over Printed Name</p>					



DREAM  
 Dynamic Risk Exposure and Assessment for Mitigation



4.

## Flight Log for 1ASN1S122A Mission

211  
Flight Log No.: 2094

Flight Log Identification: RP-CR022

1 LIDAR Operator: Mark Arb  
 2 ALT Model: Resave  
 3 Mission Name: 1ASN1S122A  
 4 Type: VFR  
 5 Aircraft Type: Cessna T206H  
 6 Aircraft Identification: RP-CR022


7 Pilot: J. Clements  
 8 Co-Pilot: M. Tangonan  
 9 Route: CDO - Aguana  
 10 Date: 03 May 2013  
 11 Airport of Departure (Airport, City/Province): CDO  
 12 Airport of Arrival (Airport, City/Province): CDO


13 Engine On: 0615  
 14 Engine Off: 0715  
 15 Total Engine Time: 4:00  
 16 Take off: 0630  
 17 Landing: 1010  
 18 Total Flight Time: 3:40


19 Weather: partly cloudy


20 Remarks: ok  
 mission completed.


21 Problems and Solutions:

Acquisition Flight Approved by  
  
 Signature over Printed Name  
 (End User Representative)

Acquisition Flight Certified by  
  
 Signature over Printed Name  
 (PAF Representative)

Plotting/Command  
  
 Signature over Printed Name

Lidar Operator  
  
 Signature over Printed Name

  
**DREAM**  
Disaster Risk Exposure and Assessment for Mitigation

# Bibliography

- Asian Development Bank. (2004). Technical assistance to the Republic of the Philippines for a master plan for the Agusan River Basin. Retrieved August 12, 2015, from <http://www.worldcat.org/title/technical-assistance-to-the-republic-of-the-philippines-for-a-master-plan-for-the-agusan-river-basin/oclc/58999955>
- Kundell, J. (Ed.). (2008, April 3). Water profile of Philippines. Retrieved August 12, 2015, from [http://www.eoearth.org/view/article/156982/#River\\_Basins\\_and\\_Water\\_Resources](http://www.eoearth.org/view/article/156982/#River_Basins_and_Water_Resources)









D R E A M  
Disaster Risk and Exposure Assessment for Mitigation

